

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington D.C. 20231  
Box Patent Applications

Case Docket No. FUJI 17.379  
Filed by Express Mail  
(Receipt No. EL522391806US)  
on June 1, 2000  
pursuant to 37 CFR 1.10  
by Lydia Gonzalez



S I R:

Transmitted herewith for filing is: ☒ a new application  
☐ a c-i-p application of S.N. \_\_\_\_\_ filed \_\_\_\_\_

Inventor(s): Yuji KOJIMA; Tetsumei TSURUOKA

For: **PACKET DATA PROCESSING APPARATUS AND PACKET RELAY  
APPARATUS**

Enclosed are:

- ☒ 17 sheets of drawings.(Figs. 1-3,4A-4E,5-17)  
☒ Specification, including claims and abstract ( 46 pages)  
☒ Declaration  
☒ An assignment of the Invention to FUJITSU LIMITED  
☒ A certified copy of Japanese Application No(s). 11-158514  
☒ An associate power of attorney  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27  
☒ Post card  
☒ Recording fee (as indicated below)  
☒ Information Disclosure Statement, PTO-1449, copies of 1 references  
☐ Other \_\_\_\_\_  
☐ Other \_\_\_\_\_

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	12-20 =	0
INDEP CLAIMS	2-3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\*If the difference in Col. 1 is less than  
zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
X 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$
x 78 =	\$
x 260 =	\$
TOTAL	\$690

☐ Please charge our Deposit Account No. 08-1634 the amount of \_\_\_\_\_ to cover the filing fee  
and recording fee (if any)

☒ A check in the amount of \$730.00 to cover the filing fee and the recording fee (if any) is enclosed.


☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or  
credit overpayment to Deposit Account No. 08-1634. A duplicate coy of this sheet is enclosed.

Helfgott & Karas, P.C.  
60<sup>th</sup> Floor  
Empire State Building  
New York, New York 10118-6098  
(212)643-5000

Date: 6/1/00

Any fee due with this paper, not fully  
covered by an enclosed check, may be  
charged on Deposit Acct No. 08-1634

Respectfully Submitted,

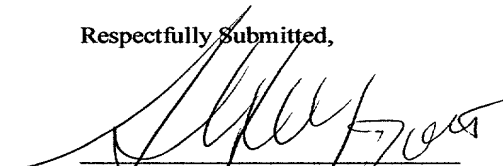

- ☐ Aaron B. Karas, Reg. No. 18,923  
☒ Samson Helfgott, Reg. No. 23,072  
☐ Leonard Cooper, Reg. No. 27, 625  
☐ Linda S. Chan, Reg. No. 42,400  
☐ Jacqueline M. Steady, Reg. No. 44,354  
☐ Harris A. Wolin, Reg. No. 39,432

Filed by Express Mail  
(Receipt No. LS-223718068)  
on 9/1/02  
pursuant to 37 C.F.R. 1.10.  
by Kozak

007090-62548560

#### SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT WE, Yuji Kojima, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan and Tetsumei Tsuruoka, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

#### PACKET DATA PROCESSING APPARATUS AND PACKET RELAY APPARATUS

of which the following is a specification : -

TITLE OF THE INVENTION

PACKET DATA PROCESSING APPARATUS AND  
PACKET RELAY APPARATUS

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to packet data processing apparatuses and packet relay apparatuses, and more particularly to the packet data  
10 processing apparatus and the packet relay apparatus using the packet data processing apparatus which is mutually connected to terminals through communication networks and which execute a packet process including a destination table searching process and a header  
15 replacing process.

2. Description of the Related Art

Recently, a communication network between terminals has been extended widely. And it is more required to link networks, for example, to mutually  
20 connect several LANs (Local Area Networks) or connect a LAN with a dedicated line, in order to extend a size of networks. Current network architecture is an IP (Internet Protocol) network. The IP is a connectionless network protocol corresponding to a  
25 network layer of an OSI (Open Systems Interconnection) reference model of the ISO (International Organization for Standardization). While a connection network protocol predetermines a communication path between terminals, a packet relay  
30 apparatus mutually connecting between LANs establishes a communication path by forwarding a packet storing communication data toward a destination in a connectionless IP network. In a relay process of the IP network, a packet process  
35 such as a destination table searching process or a header replacing process is required.

The packet process in the IP network is

007050 65548560

required to operate a checksum for a packet header, search the destination table and replace the packet header in order to relay the packet and is also required to perform a packet filtering.

- 5 Conventionally, entire packet processing is executed by software since the entire packet process is too complicate to be conducted by hardware.

FIG.1 is a diagram showing a configuration of a conventional packet relay apparatus executing the packet process by a processor. In the conventional configuration in which a processor 10 connects to a memory 11 via a bus 12 as shown in FIG.1, the conventional packet relay apparatus executes the packet process by the processor 10 storing a packet in the memory 11 and processing the packet.

The conventional packet relay apparatus 14 shown in FIG.2 includes the processor 10 and the memory 11 in FIG.1. In order to forward a packet, the packet relay apparatus 14 receives the packet by a receiving interface 15 and then stores the received packet in the memory 11 temporarily. The processor 10 sends a switch fabric 16, the received packet and information which is determined as destination information and to be attached to the received packet after the processor 10 performs the checksum, searches the destination table and replaces the packet header for the received packet during the packet process.

In the packet relay apparatus 14, the packet is sent from the switch fabric 16 to a proper one of transmission interfaces 17 based on determined destination information. The packet is transmitted from the transmission interface 17. In this manner, the conventional packet relay apparatus 14 forwards the packet to the destination.

In the packet process in the packet relay

001050-6252850

apparatus, the processor 10 in FIG.1 stores the received packet data temporarily in the memory 11 and then transfers portions of the packet data stored, which are required in accordance with instructions of a program, to a general purpose register 21. Subsequently, the processor 10 performs the packet header checksum, searches the destination table and replaces a destination address in the packet header for the packet data stored in the general purpose register 21 in accordance with an instruction order. Then, the processor 10 stores the packet data in the general purpose register 21 when it is required. After the packet data are processed, the processor 10 retrieves the packet data from the memory 11.

Referring to FIG.1, the processor 10, which is used for the packet process including the packet header checksum, the destination table search and the destination address replacement, generally includes the general purpose register 21, for example, a single set of registers r0 to r7, to maintain data to be operated or an operation result, selectors provided with the general purpose register 21 to output and input data, an operation part 22 to execute data transmission, a comparison or an arithmetic operation based on an instruction, a controller 23 to read the instruction and send a control signal to each component provided in the processor 10, a program counter 24 to maintain a program pointer of the current executing instruction, a flag register 25 to evaluate the operation result, an external bus interface 26 and an external bus buffer 27. The processor 10 executes the packet process by conducting the above components based on the instruction that is externally read.

However, recently, higher speeds and larger amounts of data in data transactions are increasingly required by networks. Also, it is

desired to improve the speed of the packet relaying process. Therefore, a special hardware circuit for the packet process has been developed and mounted in the packet relay apparatus because the packet process  
5 by software using the processor does not achieve a sufficient performance. However, it is not easy to modify the special hardware circuit in order to carry out a revised protocol or improve a service provided through a network. Disadvantageously, it is needed  
10 to newly develop another special hardware circuit each time the protocol is revised or the network service is improved.

On the contrary, the packet process conducted by the processor, which is executed by the  
15 instruction (that is, software) in the manner mentioned above, is flexible to be modified in order to carry out the revised protocol and to improve network service after mounting on the packet relay apparatus.

20 The conventional packet process, which has a high flexibility of modification, is conducted by the processor 10, the memory 11 and circuits being connected to the processor 10 and the memory 11 by the bus 12. The processor 10 transmits the packet  
25 data between the processor 10 and memory 11.

However, in the conventional packet process by the processor 10, the packet data temporarily stored in the memory 11 is read out or written on the memory 11. Disadvantageously, it is  
30 difficult to carry out a high speed of the packet process.

That is, in the conventional packet process of the processor 10, the packet data are stored in the memory 11. The processor 10 retrieves  
35 the packet data when the packet data are needed, and processes the packet data based on contents of the packet data. Then, the processor 10 writes the

001030 6232350

packet data and the process result in the memory 11. The processor 10 indicates a read-out address to the memory 11 and then reads out data from the memory 11. Similarly, the processor 11 indicates a write address to the memory 11 and then writes data to the memory 11. In this case, compared with a cycle time of the processor 10, it takes much time for the processor 10 to indicate an address to the memory 11 through to complete reading out or writing data from/to the memory 11.

In a sequential execution type of a processor, only a single process can be executed. Thus, a reading operation and a writing operation can not be carried out at the same time. In addition to the above disadvantage, it is difficult to develop a memory circuit that can realize to read out data and simultaneously write data. Generally, it is impossible for the processor to read out data from and write data to the memory at the same time. The above inconvenient operations for the reading process and the writing process to the memory prevent the processor from transmitting data to or from the memory at a high speed.

## 25 SUMMARY OF THE INVENTION

It is a general object of the present invention to provide a packet data processing apparatus and a packet relay apparatus using the packet data processing apparatus in which the above-mentioned problems are eliminated.

A more specific object of the present invention is to provide the packet data processing apparatus and the packet relay apparatus using the packet data processing apparatus which can eliminate the disadvantage related to a reading process and a writing process concerning data transmission between the processor and a memory.

The above objects of the present invention are achieved by a packet data processing apparatus for processing a packet received from a network by a processor, including: a packet data access part,  
5 which has a plurality of registers arranged in series, shifting the received packet through the plurality of registers toward an outlet in synchronization with a clock, wherein the processor processes the received packet while the received packet is being shifting  
10 through the plurality of registers.

According to the present invention, the received packet is shifted sequentially from beginning between the plurality of registers toward the outlet of the packet data processing apparatus by  
15 synchronizing with the clock. Therefore, it is possible to shift the packet data toward the outlet, independent of an instruction order. It is possible to execute a packet process by the instruction order that considers clock timings of the packet process.  
20 Also, the present invention makes the instruction order possible to be flexibly modified.

The above objects of the present invention are achieved by a packet relay apparatus for forwarding a packet received from a network,  
25 including: a plurality of packet data processors being connected in series, each packet data processor including: a packet data access part, which has a plurality of registers arranged in series, shifting the received packet through the plurality of  
30 registers toward an outlet in synchronization with a clock, wherein the processor processes the received packet while the received packet is being shifting through the plurality of registers.

According to the present invention, since  
35 the plurality of packet data processors are connected in series, it is possible to divide the entire packet process into the plurality of packet data processors

007050 6252550



and for each packet data processor to independently carry out the divided packet process.

BRIEF DESCRIPTION OF THE DRAWINGS

5           Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings, in which:

10           FIG.1 is a diagram showing a configuration of a conventional packet relay apparatus executing the packet process by a processor;

          FIG.2 is a diagram showing a configuration of the conventional packet relay apparatus;

15           FIG.3 is a diagram showing a first embodiment of a packet data processor according to the present invention;

20           FIGS.4A through 4E are diagrams showing a principle of a data transmission operation of the packet data processor in FIG.3 according to the first embodiment of the present invention;

          FIG.5 is a diagram showing the packet data processor according to the first embodiment of the present invention;

25           FIG.6 is a diagram showing the first embodiment of the packet relay apparatus including the packet data processor according to the present invention;

30           FIG.7 is a diagram showing an instruction set provided in the packet data processor according to the first embodiment of the present invention;

          FIG.8 is a diagram showing an instruction order of the data transmission when the packet data processor 30 executes the packet process, according to the first embodiment of the present invention;

35           FIG.9 is a diagram showing a second embodiment of a packet data processor according to the present invention;

007050 62523560

FIG.10 is a diagram showing a third embodiment of a packet data processor according to the present invention;

FIG.11 is a diagram showing a first  
5 embodiment of a packet data processor using the packet data processor according to the present invention;

FIG.12 is a diagram showing the instruction orders, which are executed by the packet  
10 data processor in the packet data processing apparatus and depicted in a table with a serial number, according to the present invention;

FIG.13 is a diagram showing a second embodiment of the packet data processing apparatus  
15 using the packet data processor according to the present invention;

FIG.14 is a diagram showing a forth embodiment of the packet data processor according to the present invention;

FIG.15 is a diagram showing a principle operation of the write-position changing mechanism in the packet data processor in FIG.14;

FIG.16 is a diagram showing a fifth embodiment of the packet data processor according to  
25 the present invention; and

FIG.17 is a diagram showing a principle operation of the send-position changing mechanism in the packet data processor in FIG.16.

30 DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the present invention, a packet access register unit for directly storing packet data is provided in a processor so that a packet data access mechanism is configured to access the packet data at  
35 a high speed. Therefore, the present invention can eliminate the disadvantage related to a reading process and a writing process concerning data

5                   FIG.3 is a diagram showing a first  
embodiment of a packet data processor according to  
the present invention. FIGS.4A through 4E are  
diagrams showing a principle of a data transmission  
operation of the packet data processor in FIG.3  
10 according to the first embodiment of the present  
invention.

The packet data processor 30 receives the packet data via the receiving interface, stores the packet data to the packet access register unit 32 and transmits the packet data from the packet access register unit 32. The packet data processor 30 further stores the process result from the receiving interface to the intermediate data register unit 34. The process result is output from the intermediate data register unit 34. For example, the process

result retrieved from the receiving interface may be a receiving interface number that received the packet data to be read out the packet access register unit 32 and the process result to be output by the packet data processor 30 may be a calculation result of a header checksum.

In a data transmission process in which the packet data and the process result are read out from and transmitted to the outside of the packet data processor 30, the packet data processor 30 synchronizes with a clock, sequentially stores packet data sections to the packet access register unit 32 and the process result to the intermediate data register unit 34. The packet data sections and the process result, which are stored, are shifted to the eight registers p0 through p7 in the packet access register unit 32 and to eight registers e0 through e7 in the intermediate data register unit 34 by synchronizing the clock.

In FIGS.4A through 4E, operations shifting the packet data and the process result in the packet access register 32 and the intermediate data register 34 are described at a clock time unit. In each of FIGS.4A, 4B, 4C, 4D and 4E, a status of data stored in the packet access register 32 and the intermediate data register 34 by the packet data processor 30 is described at 1, 2, 3, 4 or 17 clock time. That is, FIG.4B shows the status of the data at one clock time after the status of the data described in FIG.4A.

In FIG.4A, the packet data processor 30 does not store sections a0 through a9 of a packet A to the packet access register 32. In FIG.4B showing the status when one clock has passed, the packet data processor 30 shifts the packet A for one data section and stores the section a0 of the packet A to the register p7. In FIG.4C, the packet data processor 30 moves the section a0 stored in the register p7 of the

packet access register unit 32 and the packet data processor 30 stores next section a1 after the section a0 of the packet A to the register p7 of the packet access register unit 32.

5 In FIG.4D, the packet data processor 30 stores the section a2 of the packet A by shifting stored sections in the packet access register unit 32 to next registers. In FIG.4E showing the status 13 clocks after the status in FIG.4D, the packet data  
10 processor 30 outputs several sections of the packet A after passing register p0 of the packet access register 32 and stores a few sections of a packet B that are next to the packet A. Similarly, the packet data processor 30 shifts data sections stored in the  
15 intermediate data register unit 34 by synchronizing the clock. For example, the packet data processor 30 moves data stored in the register e7 of the intermediate data register unit 34 in FIG.4C, to the register e6 of the intermediate data register unit 34  
20 as shown in FIG.4D.

In practice, it is difficult to configure the register unit that has a large capacity to store an entire packet from beginning data to ending data in a single processor. However, packet data are  
25 partially accessed in the packet process. For example, it may be a lower possibility for the packet data processor 30 to refer to the sections a0 and a9 of the packet A simultaneously. Thus, just the most essential number of registers, for example, eight  
30 registers is required for the packet access mechanism and the intermediate data maintaining and transmitting mechanism, and can be configured in the packet data processor 30.

In the intermediate data register unit 34  
35 maintaining and transmitting the process result concerning the packet, data stored in the intermediate data register unit 34 are shifted by

001030 635/3350

synchronizing the packet access register unit 32. For example, as shown in FIG.4E, a following process to the packet data processor 30 can expect an arrival of an attribute information concerning the packet at one clock after the beginning data of the packet arrives. In the packet relay apparatus, it is not required to configure a special mechanism maintaining storage locations for the packet data and the process result.

10                   A circuit configuration, in which the above packet data processor 30 shifts the data stored in the packet access register unit 32 and the intermediate data register 34 by synchronizing the clock, will now be described. In the packet data  
15                   processor 30 in FIG.3, each register of the packet access register 32 is connected to a neighbor register being one in number smaller via a selector. The packet data processor 30 moves the data to the neighbor register being one in number smaller by  
20                   synchronizing the clock signal of which an external clock signal generator of the packet data processor 30 gives to the packet data processing 30.

                  Moreover, the packet data processor 30 directly stores the packet data from the outside to  
25                   the register p7 of the packet access register 32 and directly outputs the packet data from the register p0. In this case, when the beginning of the packet data arrives at the packet data processor 30, the receiving interface of the packet relay apparatus  
30                   sends a packet arrive signal to the packet data processor 30. In response to the packet arrive signal, the packet data processor 30 conducts the packet process for the arrived packet in accordance with an instruction order that is designed by a  
35                   apparatus designer and stored in a memory or the like.

                  Based on the above packet arrive signal, the packet data processor 30 can recognize an

001099 635/3350

irregular timing of the packet arrival and starts to execute the packet process from the beginning of the instruction order when the packet arrives. In a case in which an operation part 35 executes a writing operation for updating a packet header with the process result, each selector provided between registers of the packet access register unit 32 selects write data from the operation part 35 for a destination register. In an other case, each selector selects data stored in the neighbor register being bigger in number so that the packet access register unit 32 operates as the shift register.

The intermediate data register unit 34 operates similarly to the packet access register unit 32. The packet data processor 30 directly sends the process result attached to the packet data from a preceding step of the receiving interface to the register e7 of the intermediate data register unit 34 and outputs the process result from the register e0 of the intermediate data register unit 34 to a following step of a switch fabric.

In the packet data processor 30, the operation part 35 and the packet access register unit 32 or the intermediate data register unit 34 are not connected via a bus but directly connected as shown in FIG.3. It is possible to read out or write data from or to the packet access register unit 32 or the intermediate data register 34 by synchronizing the cycle time of the packet data processor 30. As a result, the packet data processor 30 can eliminate the disadvantage related to the reading or writing operation for the packet data and can execute the reading or writing operation at high speed.

Furthermore, instead of shifting data between registers in the packet access register unit 32 or the intermediate data register unit 34 by the instruction order provided in the packet data

processor 30, for example, a data transmission instruction order, the packet data processor 30 shifts the data to the neighbor register independent of the instruction order. Thus, the packet data processor 30 can execute an arithmetic operation or other operation simultaneously when the packet data processor 30 shifts the data. In this case, regardless of the instruction order, the packet data processor 30 can replace data in each register of the packet access register unit 32 and the intermediate data register unit 34. That is, the packet data processor 30 is configured so that the receiving interface sends the packet arrival signal to the packet data processor 30 when the receiving interface receives the packet and the entire data stored in the packet access register 32 and the intermediate data register 34 is shifted by synchronizing the clock signal. Also, each instruction indicated by the instruction order is completed within the same number of clock pulses. A device designer, such as a programmer, of the instruction order can recognize which sections of the packet data or the process result in the packet access register unit 32 and the intermediate data register unit 34 are stored.

Thus, when the data, which are the packet data or the process result of the packet data, stored in each register, are changed, the device designer of the instruction order checks the data stored in each register in every step and modifies the instruction order so that the packet process for the packet data and the process result can carry out based on the modified instruction order.

As mentioned above, the mechanism for directly reading out and writing the packet data and the process result is provided. Also, in the mechanism, the data transmission is conducted independently of the instruction order. Therefore,



the disadvantage related to the conventional reading process and writing process for the packet data is eliminated. It is possible to provide the high speed packet process having high flexibility based on the instruction order.

FIG.5 is a diagram showing the first embodiment of the packet data processor according to the present invention. In FIG.5, the packet access register unit 32 and the intermediate data register unit 34 in FIG.3 are simply described. FIG.6 is a diagram showing the first embodiment of the packet relay apparatus including the packet data processor according to the present invention. Also, FIG.7 is a diagram showing an instruction set provided in the packet data processor 30 according to the first embodiment of the present invention and FIG.8 is a diagram showing an instruction order of the data transmission when the packet data processor 30 executes the packet process, according to the first embodiment of the present invention.

In the first embodiment of the packet data processor, the packet data processor 30 includes the packet access register unit 32 for storing 16 words per 32 bits of the packet data and the intermediate data register unit 34 for maintaining and transmitting the process result of the packet data. A header checksum calculation process, which is one of applications the packet data processor 30 executes, will now be described.

In FIG.5, the packet data processor 30 includes the packet access register unit 32 for storing 16 words per 32 bits of the packet data and the intermediate data register unit 34 for maintaining and transmitting the process result of the packet data and executes the packet process. The packet processor 30 includes an architecture in which one basic word has 32 bits to internally process data.

And, the registers r0 through r7 of the general purpose register unit 36, the registers e0 through e7 of the intermediate data register unit 34 and the register p0 through p7 of the packet access register unit 32 have 32-bit length, respectively.

The packet data processor 30 includes the instruction set of instruction types shown in FIG.7 and executes each instruction in accordance with the instruction order shown in FIG.8. In FIG.8, in an instruction description format that is a rule to describe an instruction, a condition code such a character "A", "≠" or the like is always additionally provided at a position preceding a mnemonic instruction depicted by such as "MOVE" or the like. When an operation result of a previous instruction corresponds to an indication of the condition code, the packet data processor 30 executes a current instruction indicated by the condition code.

For example, when the operation result of the previous instruction which the packet data processor 30 executed is zero and the condition code which the packet data processor 30 currently executes shows "=" (=0), the instruction indicated by the condition code "=" is executed. When the operation result of the previous instruction is a value other than "0", the instruction indicated by the condition code "=" is not executed. As the condition code, for example, "=" (equal to zero), "≠" (not equal to zero), "<" (less than zero), ">" (greater than zero) and "A" (Always execute) are provided. A flag register 37 provides a number of flags for condition codes for the previous operation results.

Also, a carry flag is provided in the flag register 37 to maintain a carry bit of an operation result. In the operation instruction format, when three operands are needed, a description of 'condition code, mnemonic instruction, destination

operand, source operand 1, source operand 2' is required. When two operands are needed, another description of 'condition code, mnemonic instruction, destination operand, source operand 1' is required.

5           The instruction order for reading out data from the memory by the packet data processor 30, for example, is described by a designer of the packet relay apparatus and is stored in the memory of the packet relay apparatus. Moreover, for example, when  
10 the packet relay apparatus is turned on, the memory sends each instruction based on the instruction order to the packet data processor 30. The packet data processor 30 decodes each instruction by an instruction decoder 39 provided in a controller 38  
15 and maintains a result of decoding the instruction in the controller 38 in the packet data processor 30. Therefore, it is not required for the packet processor 30 to use the clock in order to read out instructions during the packet process. The packet  
20 data processor 30 executes each instruction shown in FIG.7 at a constant number of clock pulses, that is, a constant clock frequency.

          In FIG.5, the packet data processor 30 executes, for example, an IP header checksum  
25 calculation for a packet C when the packet data processor 30 communicates via the packet C in FIG.5 on the Ethernet, which is one of data transmission standards of LAN. The IP header checksum calculation is executed to check whether or not an IP header is  
30 transmitted without any errors. When the packet C arrives at the packet data processor 30, a bit alignment output part 40, which is provided at a step preceding the packet data processor 30 shown in FIG.6, aligns the IP header of the packet C based on a 32-  
35 bit alignment and outputs the packet C to the packet data processor 30. Then, the packet data processor 30 receives the packet C.

001030 65523560

When the bit alignment output part 40  
20 outputs the beginning of the packet C to the packet  
data processor 30, the bit alignment output part 40  
sends the packet arrival signal to the packet data  
processor 30. The packet data processor 30 executes  
instruction from an order number 1 of the instruction  
25 order in FIG.8. The packet data processor 30  
executes all instructions at a constant clock pulse  
number. When the packet C arrives, the packet data  
processor 30 sequentially stores an Ethernet header  
in the register p7 of the packet access register unit  
30 32 and stores the beginning section c4 of the IP  
header in the register p7 at a fifth clock. In this  
case, the packet data processor 30 executes by  
synchronizing the clock of the packet data processor  
30 and independent of the instruction order.

35           During the order number 1 through 4 of the  
instruction order in which the packet data processor  
30 stores the beginning section c4 of the IP header

to the register p7, the packet data processor 30 transmits the section c4 stored in the register p7 of the packet access register unit 32 to the register r0 of the general purpose register unit 36 at the fifth  
5 clock. At the next clock, the packet data processor 30 adds data of the register p7 and data of the register r0 and then stores an addition result to the register r0. During the addition operation, the packet data processor 30 shifts the section c4 of the  
10 IP header stored in the register p7 at the previous clock to the register p6 and stores the next section c5 of the packet C to the register p7. That is, the instruction indicated by the order number 5 of the instruction order adds the section c4 of the IP  
15 header and the following section c5 and stores addition result in the register r0.

In a next order number 7 of the instruction order, the packet data processor 30 adds the section c6 stored in register p7 and a value of  
20 register r0 and stores a new value resulting from adding a carry bit of the above addition indicated by the order number 6 to the register r0 in order to calculate the above addition by an ones complement. Similarly, in an instruction orders 8 and 9, the  
25 packet data processor 30 further adds the sections c7 and c8 of the IP header to the register r0. In an order number 10 of the instruction order, the packet data processor 30 further adds an immediate instruction '0' (denoted by '\$0' in FIG.8, that is, a  
30 value itself is indicated, instead of an register name), the register r0 and a carrying value resulting from adding based on an instruction indicated by an order number 9, and then stores a result of the above addition to the register r0. From the above  
35 calculations, the result of each summation calculated by the ones complement is stored in the register r0 of the general purpose register unit 36 where the IP

header is aligned as a single 32-bit word.

Furthermore, in an order number 11 of the instruction order, the packet data processor 30 sends data of the register r0 to the register r1. In an order number 12 of the instruction order, the packet data processor 30 shifts data of the register r0 lower by 16 bits and then stores an upper 16 bits and the lower 16 bits of the above summation result to the register r0 and the register r1, respectively.

10 In an order number 13 of the instruction order, the packet data processor 30 adds data of the register r0 and data of the register r1 by a 16-bit word unit and then stores the addition result to the register r0. Also, in an order number 14 of the instruction order,

15 the packet data processor 30 calculates the data of the register r0 by the ones complement by a 16-bit word unit. In an order number 15 of the instruction order, since a prefixal instruction code of the mnemonic instruction 'MOVE' is ' $\neq$ ', the packet data processor 30 stores an immediate value 1 to the register e0 of the intermediate data register unit 32 when the result of the previous order number 10 is not '0'.

In a next clock, the packet data processor 30 outputs data of the register e0. Thus, it is possible to output the result of the IP header checksum outside of the packet data processor 30. Also, the packet data processor 30 can realize an error of the IP header when the intermediate data register unit 34 shows '1' at a ninth clock from the arrival of the header of the packet C.

25 30 outputs data of the register e0. Thus, it is possible to output the result of the IP header checksum outside of the packet data processor 30. Also, the packet data processor 30 can realize an error of the IP header when the intermediate data register unit 34 shows '1' at a ninth clock from the arrival of the header of the packet C.

In the packet relay apparatus 41 shown in FIG.6, when the packet C is received at the receiving interface 42, the received packet C is aligned and provided to the packet data processor 30 by the bit alignment output part 40. When the packet data processor 30 completes the packet process including

35 provided to the packet data processor 30 by the bit alignment output part 40. When the packet data processor 30 completes the packet process including

the checksum, the destination table search, the packet header replacement or the like for the received packet C, the packet data processor 30 sends the packet C with determined destination information, which is to be attached to the packet C, to the switch fabric 44. And, the packet relay apparatus 41 transmits the packet C from the switch fabric 44 via an appropriately selected transmission interface 45 based on the determined destination. The packet C is transmitted from the transmission interface 45 to the LAN and is relayed toward an ultimate destination.

As mentioned above, the packet data processor 30 executes the instruction order for shifting data between registers by synchronizing the clock. Thus, it is possible for the packet data processor 30 to execute the IP header checksum, which is one of applications of the packet process, and outputs the result of the IP header checksum to the outside of the packet data processor 30 while the packet C is being shifted.

Moreover, the packet data processor 30 directly reads out the packet data and the process result, stores to the registers and outputs the packet data and the process result by shifting data to neighbor registers, respectively, independent of the above mentioned process in accordance with the instruction order. In the present invention, the instruction order in which the data shifting is considered is executed. A modification of the instruction order is flexible to carry out several kinds of processes. Therefore, a high flexibility of modification and a high-speed packet process can be realized from the instruction order.

In the first embodiment of the packet data processor, the IP header checksum as one of applications of the packet process is described. But, even when the instruction order is modified, it is

possible for the packet data processor 30 to execute processes concerning the packet data and the process result for the packet C, similarly to the above the IP header checksum and also execute the packet process for other packets.

In the first embodiment of the packet data processor, the bit alignment output part 40 is provided before the packet data processor 30 in FIG.6. But, the packet data processor 30 may execute a process for the bit alignment by the instruction order where the packet process is indicated. Thus, it is possible to execute the packet process including the bit alignment similarly to the above mentioned packet process. When the instruction order is given to the packet data processor 30, as a maintaining manner, a result from decoding the instruction may be given from outside to the packet data processor 30 or may be maintained in a special memory provided outside of the packet data processor 30. In any one of the maintaining manners, in a condition where each instruction is completed for one clock time or a constant number of clock pulses, the data shifting mechanism for the packet data is synchronized with the instruction order. Therefore, the packet processor 30 can execute the packet process at the high speed, similarly to the described manner in the first embodiment.

Moreover, in the first embodiment of the packet data processor, the clock speed for the packet data processor 30 is the same speed as the clock speed for shifting data stored in the packet access register unit 32 and the intermediate data register unit 34. But, the clock speed for the packet data processor 30 may be two times faster than the clock for external circuits. The instruction order may be modified so that the processes for taking data in, shifting data or sending data out can be executed at



every two clocks of the packet data processor 30. Thus, the packet process can also be carried out at the high speed in the same manner mentioned above. Alternatively, the clock may be used to synchronize the packet data processor 30 with the data shifting mechanism. Thus, the packet data processor 30 can carry out the packet process at the high speed in the same manner as the first embodiment.

In the first embodiment of the packet data processor, the packet data processor 30 stores the packet data itself in the packet access register unit 32 and the stored packet data is shifted in the packet access register unit 32. It should be noted that the present invention is not limited to store the packet data in the packet access register unit 32, but indicators concerning the packet data can be stored.

Furthermore, in the first embodiment of the packet data processor, the data stored in the packet access register unit 32 is moved to the next register by synchronizing the clock. But, instead of moving the data to the next register, the selector may sequentially select the register based on the clock cycle used to execute the instruction. Even if the same register, for example, the register p0, is always indicated, the packet data stored in the packet access register unit 32 can be shifted.

FIG.9 is a diagram showing a second embodiment of the packet data processor according to the present invention. A packet data processor 301 in FIG.9 includes the packet access register unit 32 but not the intermediate data register unit 34 and carries out the packet process. The intermediate data register unit 34 is configured to send the process result of packet data, which is to be attached, and the attribute information concerning the packet data out of the packet data processor 301.

And also, the intermediate data register unit 34 is capable of receiving data from outside of the packet data processor 301. In a case in which data concerning packet process executed by the packet data processor 301 requires a mechanism similar to the intermediate data register unit 34, the packet access register unit 32 instead of the intermediate data register unit 34 makes it possible for the packet data processor 301 to carry out the packet process.

Based on data concerning the packet process, necessary sections of the packet data are read out and the read necessary sections are processed. Just the packet access register unit 32 is necessary to process a result of processing the sections into the packet data. For example, in a case of an IP header checksum re-calculation which is one of applications for the packet process and different from the IP header checksum calculation, the IP header is read out and then a calculated checksum value is written in a checksum field of the packet data. Consequently, in the IP header checksum re-calculation, it is not required to send the process result of the packet data, which is attached to the packet data, and the attribute information concerning the packet data out of the packet data processor 301 or to receive data from the outside of the packet data processor 301. Therefore, only the packet access register unit 32 is required for the packet data processor 301 to carry out the IP header checksum re-calculation.

FIG.10 is a diagram showing a third embodiment of the packet data processor according to the present invention. As shown in FIG.10, a packet processor 302 includes a search memory 50 for storing a destination table or the like in the packet data processor 302. The packet data processor 302 determines one of transmission interfaces based on

001099-623/23560

the destination address indicated in the packet header, that is, one of LANs which is an approximate communication path toward the destination address, by searching the search memory 50 provided in the packet data processor 302.

The packet data processor 30 stores a table showing a correspondence between the destination address indicated in each packet header and an output in the search memory 50. In the packet process, the packet data processor 302 can obtain information including the transmission interface necessary to send the packet out by searching the destination table. For example, a forwarding table, which shows the transmission interface number corresponding to the destination address provided in an Ethernet header, that is, a DA (Destination Address) in the packet C in FIG.10, is stored in the search memory 50. The approximate transmission interface number to forward the packet is obtained by searching the search memory 50 from the destination address maintained in the packet as a search key.

In the search memory 50 in FIG.10, one entry includes 64 bits. In a searching operation, when the packet data processor 30 sets search key information to search key registers 51 and 52 (k0, k1) based on the instruction, a search memory controller 54, independent of the instruction order, compares every entry in the search memory 50 with data of the search key registers 51 and 52. Then, the search memory controller 54 outputs entry data corresponding to the data of the search key registers 51 and 52 to hit content registers 55 and 56 (h0, h1). Also, the search memory controller 54 outputs information showing whether or not the entry corresponding to the data of the search key registers 51 and 52 exists, to a search flag register 58 (hf).

In this case, in order to carry out the

00000000000000000000000000000000

packet process based on the instruction order by the packet data processor 302, it is required for the packet data processor 302 to always obtain the search result at the constant number of clock pulses, independently of the number of entries stored in the search memory 50 even if the number of entries are increased. If the above searching process is not completed at the constant clock pulse number and the packet data processor 30 fails to obtain the search result at the constant clock pulse number, the data shifting process fails to synchronize with the instruction order. As a result, at a certain time, the describer of the instruction order can not recognize which data the packet data processor 302 stored in each register. Consequently, the search memory controller 54 compares all entries with data of the search key registers 51 and 52 in parallel, instead of comparing with each entry one by one in sequence. To realize the above comparing process, for example, a CAM (Content Addressable Memory) may be used as a memory device.

As mentioned above, the packet data processor 302 accesses the search memory 50 using, for example, CAM by using the search key registers 51 and 52 so that the packet data processor 302 can obtain the search result by synchronizing with the above data shifting process in the packet access registers unit 32 and the intermediate data register unit 34. Thus, the packet data processor 302 can modify the packet access register unit 32 and the intermediate data register unit 34 based on the search result by the instruction. Therefore, the packet data processor 302 including the search memory 50 shown in FIG.10 can execute the packet process for searching the table.

In the third embodiment of the packet data processor, the packet data processor 302 includes the

search memory 50, one entry of which has 64 bits, the search key registers 51 and 52 being two sets of 32 bit length register, the registers 55 and 56 for obtaining the search result, which are two sets of 32 bit length, and the single register 58 for checking the search result. It should be noted that the packet data processor 302 does not depend on the length of the entry or a number of registers and can obtain the search result at the constant number of clock pulses. In a case in which the search memory 50 has a mechanism for synchronizing with the data shifting in the packet access register unit 32 and the intermediate data register unit 34, the packet data processor 302 can carry out the packet process in the same manner as mentioned above.

FIG.11 is a diagram showing a first embodiment of a packet data processor using the packet data processor 30 according to the present invention.

In FIG.11, three packet data processors 30A, 30B and 30C are connected in series. In the packet process, data output from the intermediate data register unit 34 or the packet access register unit 32 of each of the packet data processor 30A and 30B are input to each of the next packet data processor 30B and 30C, respectively. These three packet data processor 30A, 30B and 30C are directly connected in series in a single integrated circuit chip by wiring. A previous packet data processor sends data to a next packet data processor.

FIG.12 is a diagram showing the instruction orders, which are executed by the packet data processor 30A, 30B and 30C in the packet data processing apparatus and depicted in a table with a serial number, according to the present invention. In the packet process, for example, the packet data processor 30A executes an IP header length check, the

In the IP header length check, it is checked whether or not a value stored in an IP header field of the IP header (shown in magnified diagram of the packet C in FIG.11) is less than '5' which is an invalid value. In the IP header checksum calculation, the same process as mentioned before is executed. In the TTL decrease operation, a value stored in a TTL field of the IP header is decreased. The value in the TTL field is decreased each time a packet passes through a packet relay apparatus. When a result from decreasing the TTL is '0', the packet is discarded. Thus, the TTL decrease operation suppresses the packet to be continuously relayed by an error caused by a network operation.

The packet data processor 30A reads out the beginning data of the packet C in FIG.11 and then the IP header length check, which is one of applications for the packet process, is executed from an order number 1 in accordance with the instruction order for the packet data processor 30A in FIG.12. Thus, the packet C is output to the packet data processor 30B. Next, the packet data processor 30B reads out from the beginning data of the packet C and then the IP header checksum calculation, which is one of applications for the packet process, is executed from an order number 1 in accordance with the instruction order for the packet data processor 30B in FIG.12. Thus, the packet C is output to the packet data processor 30C. Next, the packet data processor 30C reads out from the beginning data of the packet C and then the TTL decrease operation, which is one of applications for the packet process, is executed from an order number 1 in accordance with the instruction order for the packet data processor

30C in FIG.12.

Referring to FIG.12, in the serial numbers 17 through 23, the instruction order for the packet data processor 30B and the instruction order for the packet data processor 30C are executed in parallel. That is, both of the packet data processors 30B and 30C process the packet C simultaneously. In the instruction order for the packet data processor 30A in FIG.12 to execute the IP header length check, before the IP header length field of the IP header of the packet C reaches the packet data processor 30A, the packet data processor 30A creates a bit pattern for retrieving the IP header length field to the register r1 of the general purpose register unit 36 by the order numbers 2 through 4 of the instruction order, stores the value in IP header length field to the register r0 by the order numbers 5 and 6 of the instruction order, decreases an immediate value 5 for minimum header length by the order number 7, checks whether or not the decreased result is negative, and writes a checked result in the intermediate data register unit 34 by the order number 8. Consequently, the packet data processor 30A sends the checked result out of the packet data processor 30A.

The instruction order for the packet data processor 30B to execute the IP header checksum calculation is the same instruction order shown in FIG.8. The packet data processor 30B executes the same packet process as the packet data processor 30 in FIG.5.

In the instruction order for the packet data processor 30C in FIG.12 to execute the TTL decrease operation, before the TTL field of the IP header of the Packet C reaches the packet data processor 30C, the packet data processor 30C creates a bit pattern for retrieving fields other than the TTL field to the register r3 of the general purpose

register unit 36 by the order numbers 4 through 6 of the instruction order, stores the value in the TTL field to the register r1 by the order numbers 7 and 8 of the instruction order, decreases an immediate value 5 by the order number 9, checks whether or not the decreased result is '0', and writes a checked result in the intermediate data register unit 34 by the order number 10.

In addition, the packet data processor 30C stores the TTL field and other fields in the packet access register unit 32 by the order number 11 through 13 and carries out updates concerning the TTL field of the packet header. The packet data processor 30C writes values corresponding to the updates to the intermediate data register unit 34. For example, it can be realized that the next switch fabric 44 receives the written values but does not forward the packet.

The above instruction orders describe the instructions for the packet C only. In practice, packets arrive intermittently but continuously at the packet data processing apparatus. For example, a pipeline process by multiple processors may be applied so that a next packet D can be processed by the packet data processor 30A from the serial number 20. In the serial number 17 through 23, the packet data processor 30B and the packet data processor 30C simultaneously execute processes for the same packet C. It is also one of pipeline processes for the single packet C.

As mentioned above, a plurality of the packet data processors 30A, 30B and 30C are connected as shown in FIG.11 and each of packet data processors 30A, 30B and 30C independently executes the packet process by the instruction orders shown in FIG.12. The packet process can be carried out as the pipeline process. Also, the packet process having a large



amount of process data can be carried out at high speed. In the first embodiment of the packet data processing apparatus, a logical single operation set, which is a part of the packet process such as the IP header length check, the IP header checksum calculation or the TTL decrease operation executed by each packet data processor 30A, 30B or 30C, is conducted. But alternatively, within a total clock pulse number in which a single packet data processor execute a process, for example, the packet data processor 30A may execute the IP header length check and continue to execute until a middle of the IP header checksum calculation. Regardless of the logical single operation set, it is possible to execute the packet process.

FIG.13 is a diagram showing a second embodiment of the packet data processing apparatus using the packet data processor 30 according to the present invention. In FIG.13, three packet data processor 30A, 30B and 30C are connected in series. In the packet process, data output from the intermediate data register unit 34 or the packet access register unit 32 of each of the packet data processor 30A and 30B are input to each of the next packet data processor 30B and 30C, respectively. In addition, a global (shared) register unit 60 is provided as an area where the three packet data processor 30A, 30B and 30C share data.

The global register unit 60, for example, includes eight 32-bit length registers g0 through g7 and is additionally and directly connected to each packet data processor 30A, 30B or 30C in the single integrated circuit chip by wiring. Therefore, each packet data processor 30A, 30B or 30C can directly access the global register unit 60 using the same instructions as the registers provided in each packet data processor 30A, 30B or 30C.



register unit 60, between the packet data processor 30A, 30B and 30C, for example, it is possible to realize another data transmission such that a processor reads out data immediately after another  
5 processor writes the data, instead of one way data transmission from the packet data processor 30A to the packet data processor 30B and to the packet data processor 30C.

That is, the packet process, which is  
10 generally executed by using the general purpose register unit 36 provided in the single packet data processor 30, is simultaneously executed in parallel by using two packet data processors 30 and the global register unit 60. Therefore, the packet process can  
15 be carried out at higher speed.

For example, the above packet process can be described by the instruction order in FIG.12. In the instruction order for the packet data processor 30C, waiting time until a necessary field of a packet  
20 arrives is utilized to create the bit pattern which is used later (the order numbers 4 through 6). However, when the waiting time does not exist, the bit pattern is created after a last order number 15 of the instruction order for the packet data  
25 processor 30B, data are written in the global register unit 60. Then, the packet data processor 30C utilizes the global register unit 60. In this case, in the packet data processor 30C, it is possible to effectively create the bit pattern by  
30 executing the instructions within a less number of clock pulses than the packet data processor 30C itself creates the bit pattern. As mentioned above, by providing the global register unit 60, it is possible to optimize the instruction order between  
35 the packet data processors 30A, 30B and 30C.

Also, in a case in which entire packet data can not be stored in the packet access register

001050 625/8560

unit 32, portions of the packet data, which can not be stored in the packet access register unit 32, are stored in the global register unit 60. Consequently, it is possible for the next packet data processor 30B or 30C to refer to the portions of the packet data.

In addition, the global register unit 60, instead of being a data transmission means, can be utilized as the general purpose register unit 36 for each packet data processor 30A, 30B or 30C.

Therefore, instead of increasing a number of registers in the general purpose register unit 36 of each packet data processor 30A, 30B or 30C, the global register unit 60 can be multi-used by the packet data processor 30A, 30B and 30C. It is substantially possible to increase the number of registers for the general purpose register unit 36.

FIG.14 is a diagram showing a fourth embodiment of the packet data processor according to the present invention. The packet data processor 30 additionally includes a write-position changing mechanism for changing a write-position where data is written from outside of the packet data processor 30.

FIG.15 is a diagram showing a principle operation of the write-position changing mechanism in the packet data processor 30 in FIG.14. In the write-position changing mechanism as shown in FIG.15, the write-position, which indicates a position in a packet access register unit 132 or an intermediate data register unit 134 to write data from the outside of the packet data processor 30, can be changed to any one of registers p7 through p0 in the packet access register unit 132 or any one of registers e7 through e0 in the intermediate data register unit 134.

For example, in FIG.15, in the packet data processor 30, data are written to the register p4 of the packet access register unit 132 and the register e4 of the intermediate data register unit 134 from

5

10

20

25

35

data processor 30 in FIG.14, in the IP header length check executed by the packet data processor 30A, just the register p7 of the packet access register unit 32 is referred to by the order number 5 of the

5 instruction order. Thus, by changing the write-position, one register of the packet access register unit 32 is used for the packet data to pass through the packet processor 30. Consequently, it is possible to reduce the maintaining time that the

10 packet data maintains in the packet data processor 30. However, this case depends on the information of the packet process. In the TTL decrease operation executed by the packet data processor 30C in Fig.12, the register p7 of the packet access register 32 is

15 referred to by the order number 7 of the order instruction and data is written in the register p0 of the packet access register unit 32 by the order number 13 of the instruction order. Thus, it is impossible to reduce a simultaneous accessible range

20 of the packet data by changing the write-position. Hence, the device designer predetermines the write-position based on the information of the packet process that the packet data processor 30 executes.

FIG.16 is a diagram showing a fifth

25 embodiment of the packet data processor according to the present invention. The packet data processor 30 additionally includes a send-position changing mechanism for changing a send-position where data is sent to the outside of the packet data processor 30.

30 FIG.17 is a diagram showing a principle operation of the send-position changing mechanism in the packet data processor 30 in FIG.16. In the send-position changing mechanism as shown in FIG.17, the send-position, which indicates a position in a packet

35 access register unit 232 or an intermediate data register unit 234 to send data to the outside of the packet data processor 30, can be changed to any one

of the registers p7 through p0 in the packet access register unit 232 or any one of the registers e7 through e0 in the intermediate data register unit 234. It should be noted that the packet access register unit 232 includes the same registers p7 through p0 as the packet access register unit 132 and the intermediate data register unit 234 includes the same registers e7 through e0.

For example, in FIG.17, in the packet data processor 30, data are written to the register p7 of the packet access register unit 232 and the register e7 of the intermediate data register unit 234 from the outside of the packet data processor 30, are passed through the registers p6 and p5 and the registers e6 and e5 by synchronizing the clock, and output from the register p4 of the packet access register unit 232 and the register e4 of the intermediate data register 234. In addition, in the send-position changing mechanism, data, which the packet access register 232 already input, are passed through the registers e3, e2, e1 and e0 and the registers p3, p2, p1 and p0 in sequence. The packet data processor 30 can read the data passing through the register e3, e2, e1 and e0 or the register p3, p2, p1 and p0 but do not transmit the data to the outside of the packet data processor 30.

For example, the controller 38 in FIG.16 additionally includes a register for maintaining a select signal which is sent to a selector sp10 of the packet access register unit 232 and a selector se10 of the intermediate data register unit 234. In addition, before the send-position changing mechanism is activated, the select signal is written and maintained in the register by an outside apparatus managing processor or a like as setting information.

In the send-position changing mechanism, for example, the entire packet data stored in the

registers p0 through p7 of the packet access register unit 232 are input the single selector sp10 and the selector sp10 selects which data section is sent to the outside of the packet data processor 30. The  
5 data are shifted between the registers p0 through p7, independent of the selector sp10. It is possible for the packet data processor 30 to read the data, which are supplied to a next process, from any one of the registers p0 through p7.

10 A mechanism for sending data from the intermediate data register unit 234 is the same as the send-position changing mechanism. The selectors sp10 and se0 operating as mentioned above are provided and the send-position changing mechanism is  
15 provided to change the send-position.

By the send-position changing mechanism, based on the information of the packet process executed by the packet data processor 30, the send-position is changed. Therefore, it is possible to  
20 reduce a maintaining time to maintain each portion of the packet data in the packet data processor 30. Moreover, the data, which are supplied to the next process, still remain at positions shifted after the send-position in the packet access register unit 232.  
25 Therefore, it is possible to refer to the data from the packet access register unit 232.

In the packet data processor 30 including the write-position changing mechanism in FIG.14, the packet data processor 30 executes a process referring  
30 to the packet data at the constant clock pulse number after the packet data are input to the packet data processor 30. In this case, even if it can not be possible to reduce the maintaining time for maintaining the portions of the packet data in the  
35 packet data processor 30, the data, which is sent out for the next process, can be referred to in the third embodiment of the packet data processor 30 in FIG.16.

001050-625/6560



Thus, it is possible to reduce the maintaining time.

As mentioned above, according to the present invention, while the packet data processor 30 stores the packet data directly from the outside of the packet data processor 30 to the packet access register unit 32, 132 or 232 and the intermediate data register unit 34, 134 or 234, which are provided in the packet data processor 30, the stored packet data are sequentially shifted in the packet access register unit 32, 132 or 232 and the intermediate data register unit 34, 134 or 234. A certain range of the packet data can be referred. Consequently, it is possible to complete the packet process by a small number of registers. Also, it is possible to eliminate the conventional disadvantage related to the process for reading or writing the packet data from or to the memory during the data transmission.

By using registers, instead of the memory, the present invention can eliminate the conventional disadvantage related to the process for reading or writing the packet data and realize the high speed packet process. In addition, according to the present invention, in the data transmission, the mechanism in which the data stored in the registers are sequentially shifted is provided and the packet data processor 30 executes the instructions by synchronizing the data transmission. Therefore, the packet process can be executed in accordance with the instruction order. Also, the packet process can be highly flexible so that it is possible to easily modify the packet process and be executed at high speed.

Moreover, the intermediate data register unit 34, 134 or 234 for maintaining and transmitting the process result of the packet data is provided in the packet data processor 30 and synchronizes with the packet access register unit 32, 132 or 232.

Therefore, a special mechanism for showing locations storing the packet data and the process result of the packet data is not required.

Furthermore, when the plurality of the  
5 packet data processor is connected in series and the packet process is conducted in the pipeline method, by providing the global register unit 60 to share data between the packet data processors, it is possible to optimize the packet process between the  
10 packet data processors.

In addition, in the present invention, the write-position changing mechanism, which changes the register where the packet data is written, is provided in the packet data processor 30. Therefore,  
15 it is possible to reduce the maintaining time for maintaining the packet data in the packet data processor 30.

Also, by providing the send-position changing mechanism, which changes the register where  
20 the packet data is sent out, it is possible to reduce the maintaining time for maintaining the packet data in the packet data processor 30 and to still refer to the data, which are sent out to the next process. Consequently, even if the packet data processor 30  
25 implementing the write-position changing mechanism can not reduce the maintaining time for maintaining the packet data in the packet data processor, the sent-position changing mechanism can reduce the maintaining time.

30 The present invention is not limited to the specifically disclosed embodiments, variations and modifications, and other variations and modifications may be made without departing from the scope of the present invention.

35 The present application is based on Japanese Priority Application No. 11-158514 filed on June 4, 1999, the entire contents of which are hereby

001039 66523560

incorporated by reference.

001000 00000000

WHAT IS CLAIMED IS:

5

1. A packet data processing apparatus for processing a packet received from a network by a processor, comprising:

10 a packet data access part, which has a plurality of registers arranged in series, shifting the received packet through the plurality of registers toward an outlet in synchronization with a clock,

15 wherein the processor processes the received packet while the received packet is being shifting through the plurality of registers.

20

2. The packet data processing apparatus as claimed in claim 1, further comprising:

an intermediate data maintaining part,  
which has a plurality of registers arranged in series,  
25 sequentially shifting intermediate data showing a  
process result of the received packet through the  
plurality of registers toward the outlet in  
synchronization with the clock.

30

3. The packet data processing apparatus as claimed in claim 1, further comprising a search table, wherein said processor searches the search table by using data of the received packet, and retrieves information corresponding to the data of

the received packet.

5

4. The packet data processing apparatus  
as claimed in claim 1, wherein said processor  
processes the received packet being shifted by said  
packet data access part in accordance with a set of  
10 instructions.

15

5. The packet data processing apparatus  
as claimed in claim 4, wherein the set of sequential  
instructions is for executing a checksum calculation  
for the received packet.

20

6. The packet data processing apparatus  
as claimed in claim 4, wherein the set of sequential  
25 instructions is for executing a Time-To-Live  
calculation for the received packet.

30

7. The packet data processing apparatus  
as claimed in claim 1, further comprising a search  
table, wherein said processor searches said search  
table for transmission interface information by using  
35 a destination address stored in the received packet,  
and retrieves the transmission interface information  
corresponding to the destination address, in

001050" 625/8560

100

10 forwarding a packet received from a network,  
comprising:

15                   a packet data access part, which has a plurality of registers arranged in series, shifting the received packet through the plurality of registers toward an outlet in synchronization with a clock,

25

35           10. The packet relay apparatus as claimed  
in claim 8, further comprising:

a shared data access part, which has at

5

10       a write-position changing part changing a  
write-position of said plurality of registers of the  
packet data access part where the write-position  
defines an inlet point at which said packet data  
access part receives the packet from an exterior  
thereof.

12. The packet data processing apparatus  
20 as claimed in claim 1, further comprising:

a send-position changing part changing a  
send-position of said plurality of registers of the  
packet data access part where the send-position  
defines an outlet point at which said packet data  
25 access point sends the packet to an exterior thereof.

ABSTRACT OF THE DISCLOSURE

In a packet data processing apparatus for processing a packet received from a network by a processor, a packet data access part includes a  
5 plurality of registers arranged in series and sequentially shifts the received packet through the plurality of registers toward an outlet of the packet data access part in synchronization with a clock.  
The processor processes the received packet by  
10 accessing the packet data access part while the received packet is being shifting through the plurality of registers.

007090 6252850



FIG.1

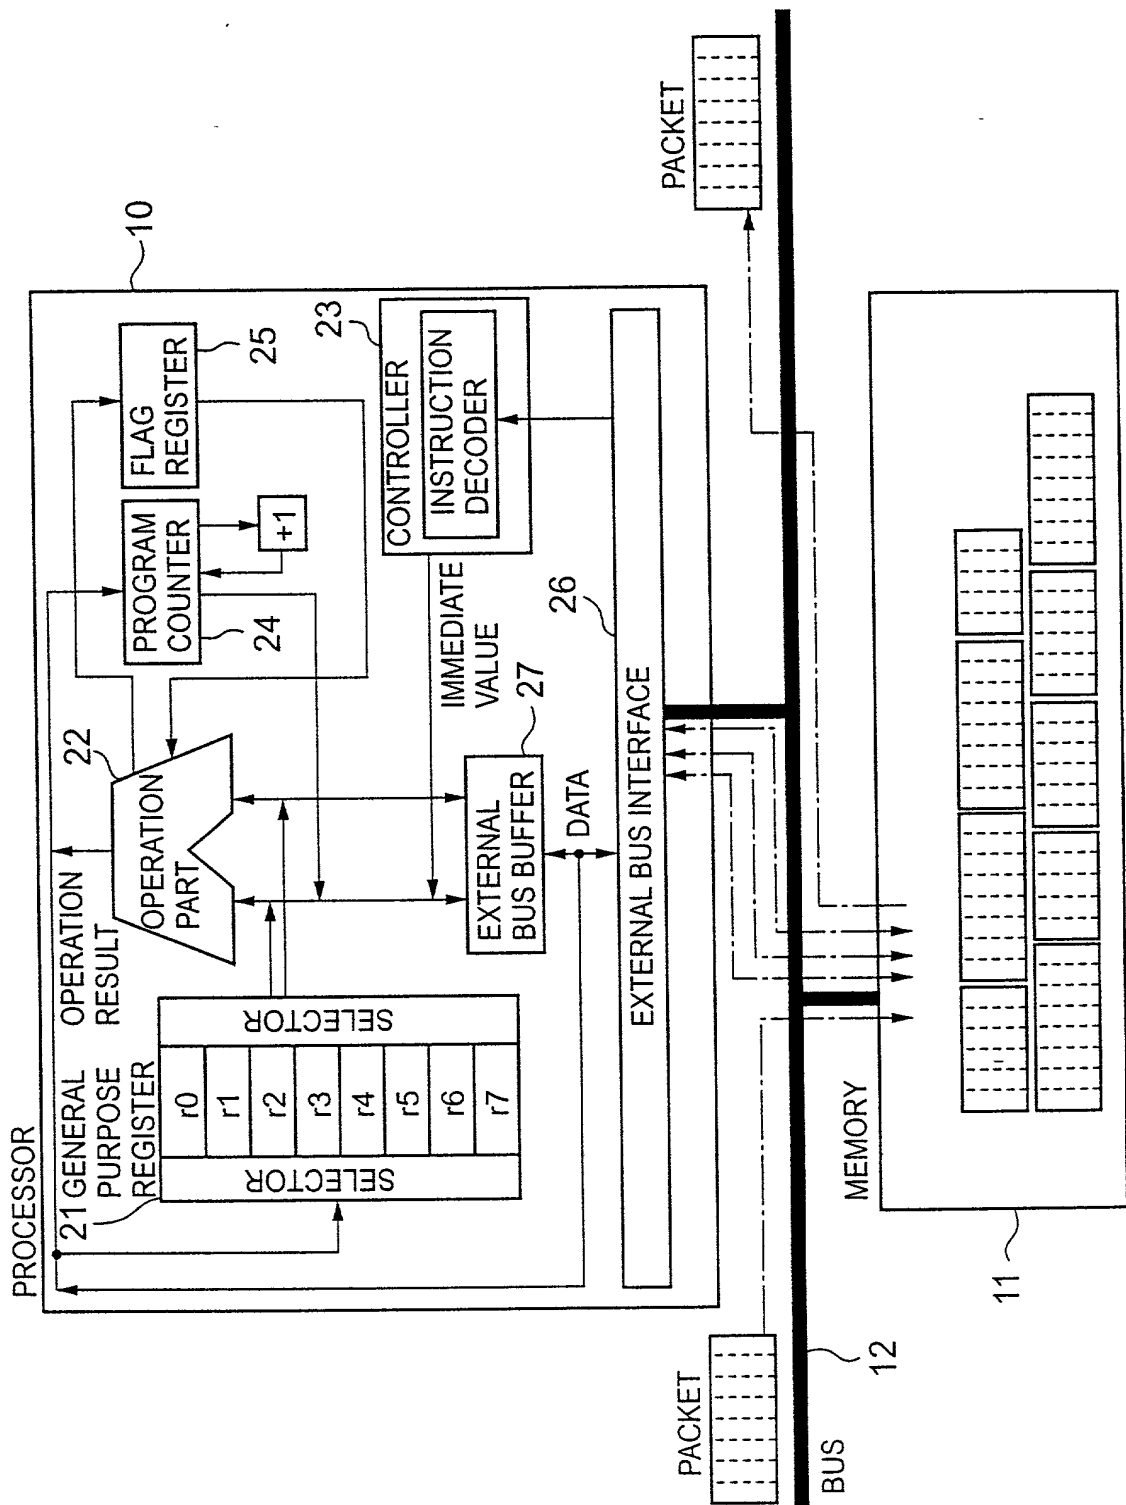


FIG.2

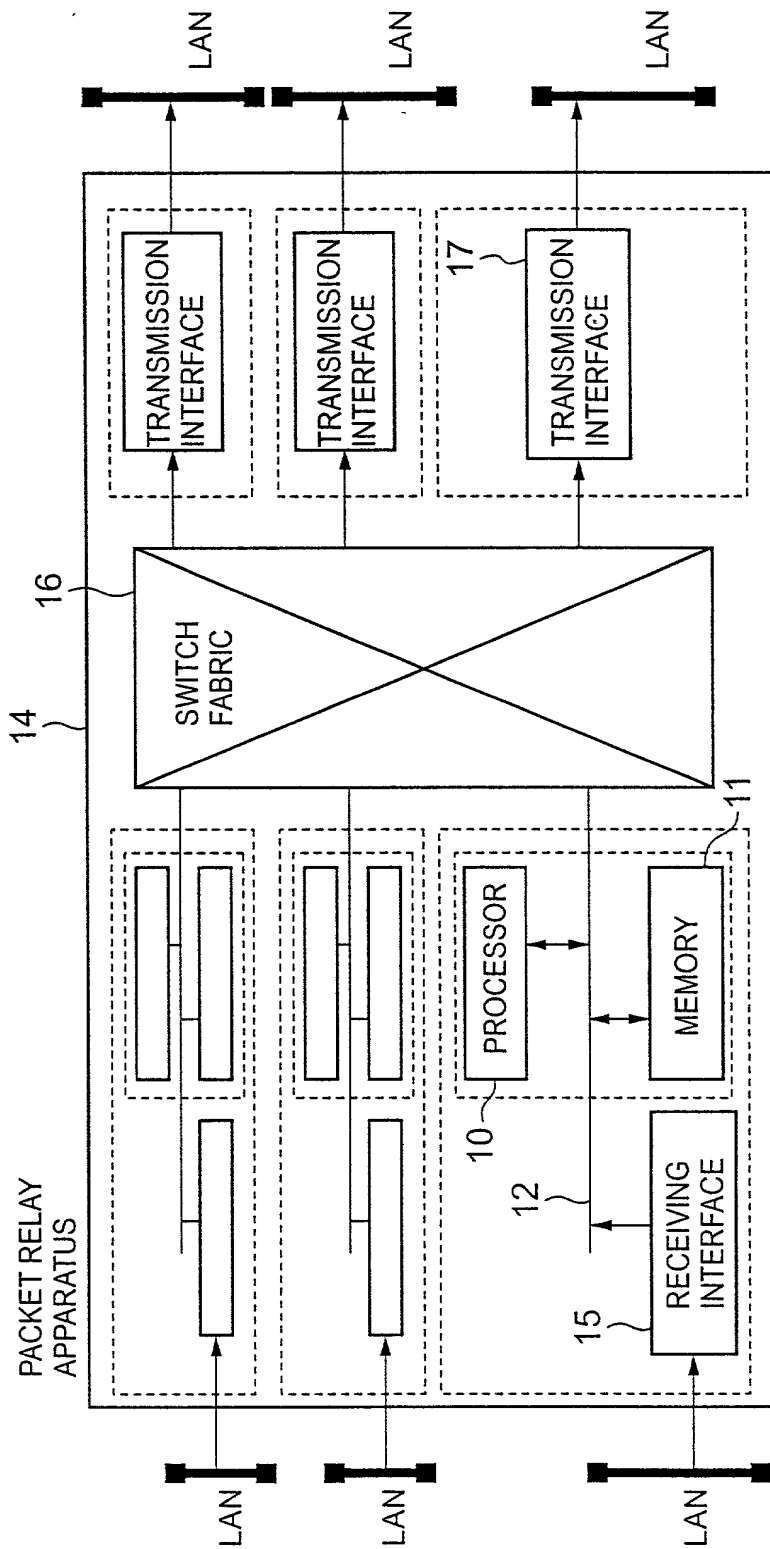


FIG.3

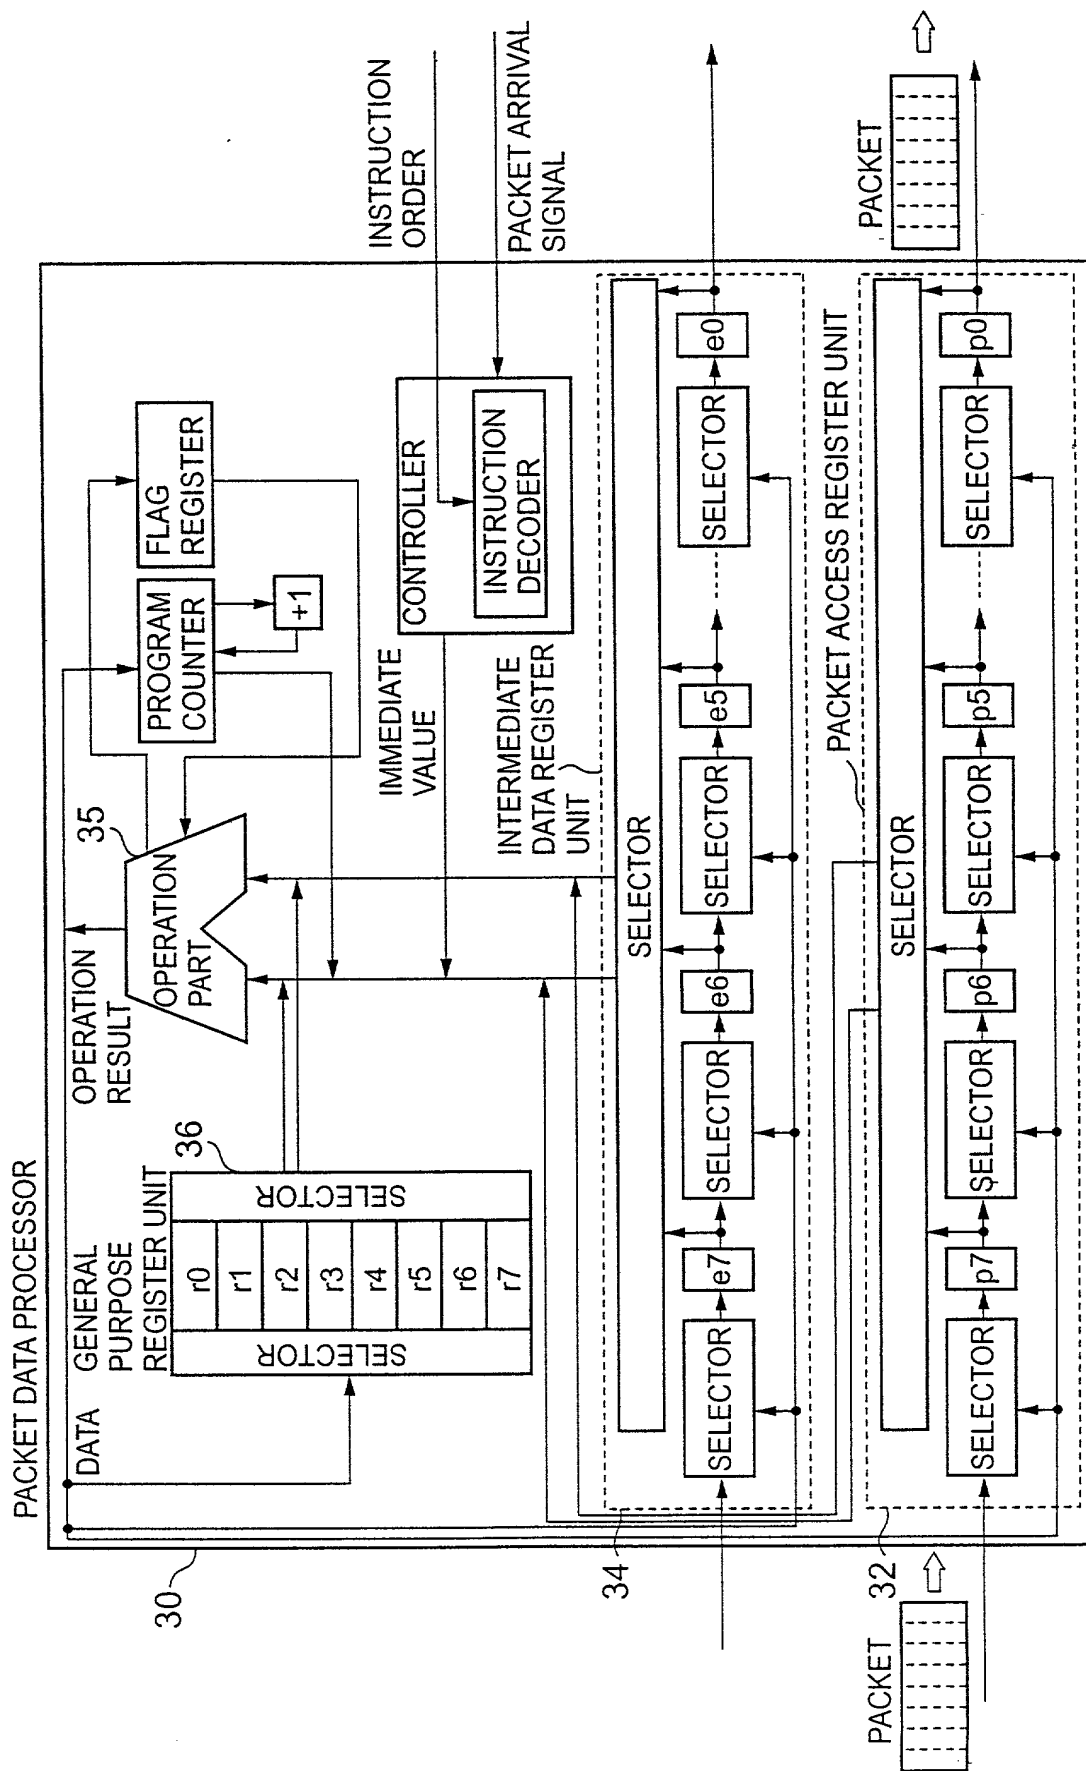




FIG.5

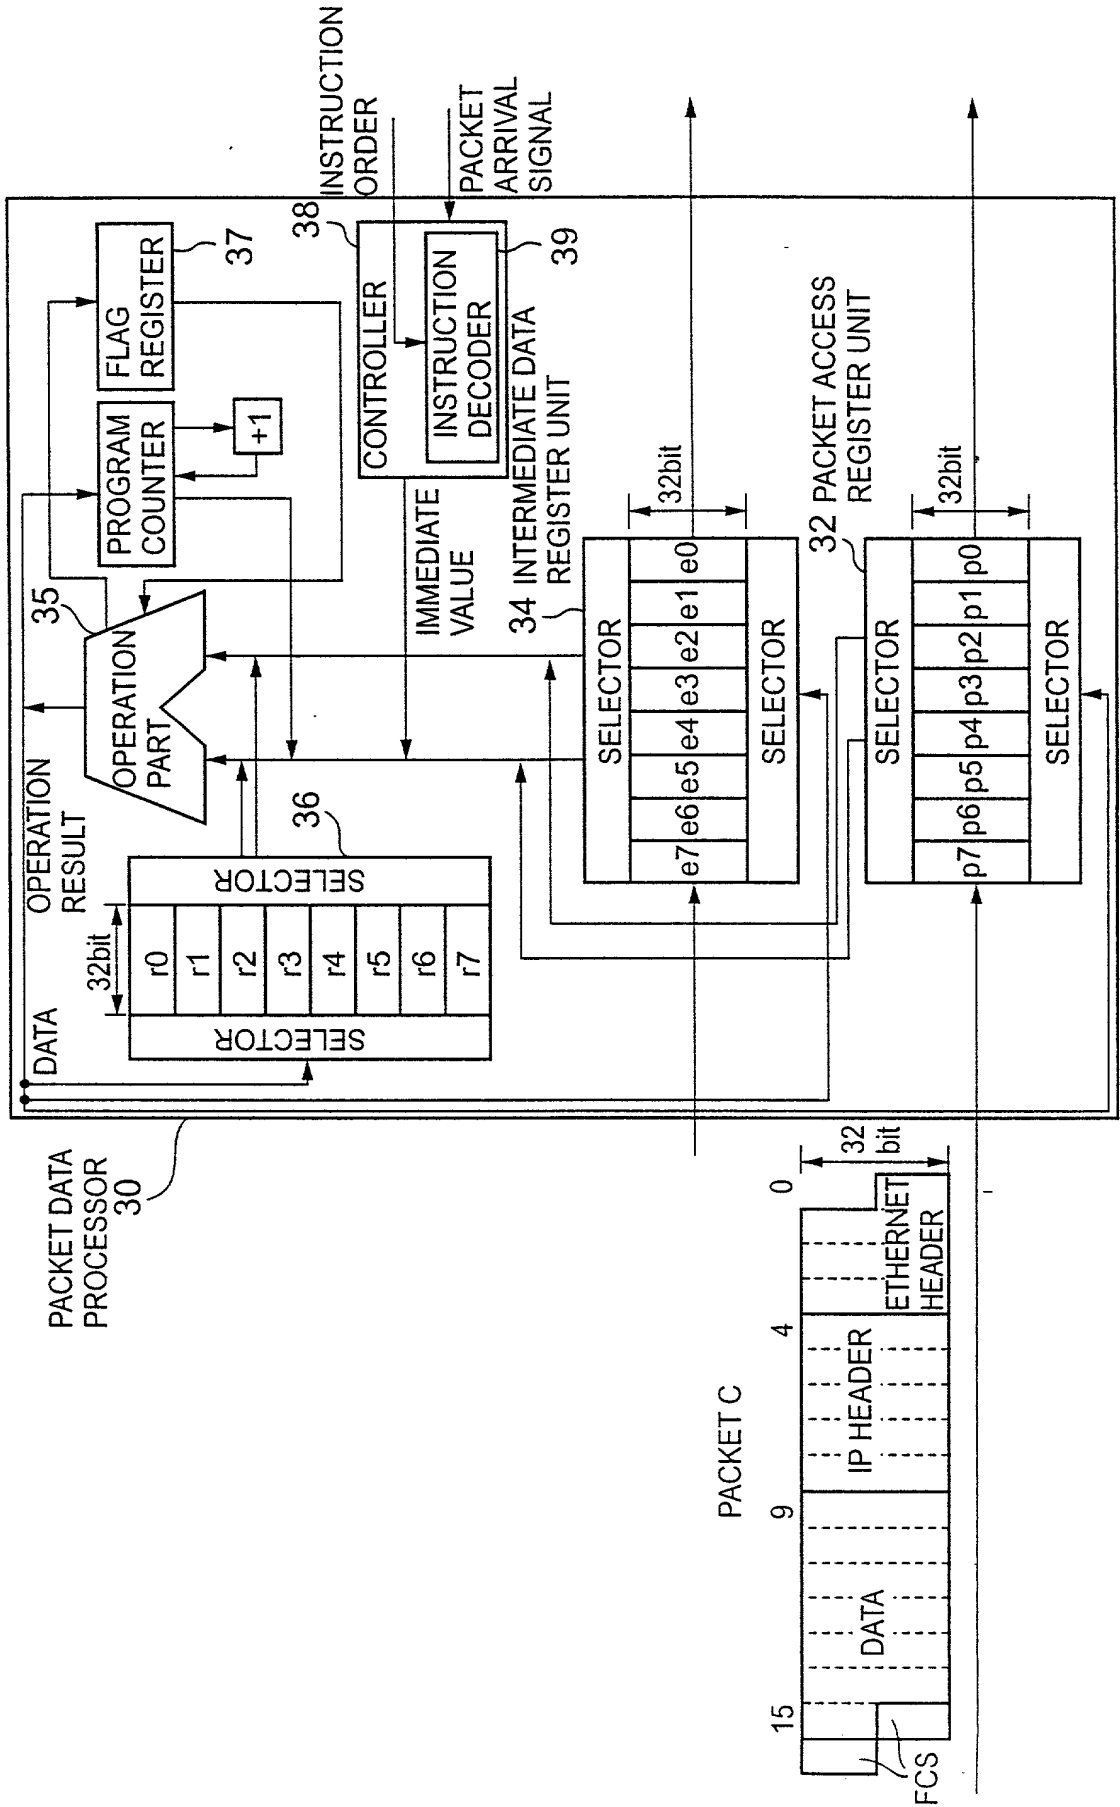




FIG. 7

INSTRUCTION TYPE	MNEMONIC INSTRUCTION	OPERATION
NO OPERATION	NOP	No operation but just clock is executed
DATA TRANSMISSION	MOVE	Move word between registers or memories
	MOVW	Move lower word (lower bits) between registers
	MOVB	Move lower byte (lower bits) between registers
ARITHMETIC OPERATION	ADD	Add word integers
	ADC	Add carry and word integer
	ADW	Add lower word
	AWC	Add lower word and carry
	SUB	Subtract word integer
	SBW	Subtract lower word
LOGICAL OPERATION	OR	OR operation of word
	AND	AND operation of word
	XOR	Exclusive-OR operation of word
	NOT	NOT (inverse) operation of word
	NTW	NOT (inverse) operation of lower word and no operation of upper word
	NTB	NOT (inverse) operation by byte
	SFL	Shift left to upper byte and fill 0 to lower byte
	ROTL	Rotate to left
	SFR	Shift right to lower byte and fill 0 to upper byte
	ROTR	Rotate to right
BIT OPERATION	BSF	Get first bit '1' position from lower most bit of source operand
	BSR	Get first bit '1' position from upper most bit of source operand
	BT	Offset bit of source operand 2 based on source operand 1. Set result bit to carry flag of flag register.

# FIG. 8

ORDER NUMBER	INSTRUCTION	SECTION WHICH OF PACKET C IS STORED IN PACKET ACCESS REGISTER UNIT							
		p7	p6	p5	p4	p3	p2	p1	p0
1	ANOP	c0							
2	ANOP	c1	c0						
3	ANOP	c2	c1	c0					
4	ANOP	c3	c2	c1	c0				
5	AMOVE r0 p7	c4	c3	c2	c1	c0			
6	AADD r0 r0 p7	c5	c4	c3	c2	c1	c0		
7	AADC r0 r0 p7	c6	c5	c4	c3	c2	c1	c0	
8	AADC r0 r0 p7	c7	c6	c5	c4	c3	c2	c1	c0
9	AADC r0 r0 p7	c8	c7	c6	c5	c4	c3	c2	c1
10	AADC r0 r0 \$0	c9	c8	c7	c6	c5	c4	c3	c2
11	AMOVE r1 r0	c10	c9	c8	c7	c6	c5	c4	c3
12	ASFR r0 r0 \$16	c11	c10	c9	c8	c7	c6	c5	c4
13	AADW r0 r0 r1	c12	c11	c10	c9	c8	c7	c6	c5
14	ANTW r0 r0	c13	c12	c11	c10	c9	c8	c7	c6
15	≠MOVE e0 \$1	c14	c13	c12	c11	c10	c9	c8	c7

001090-625/8360



FIG.9

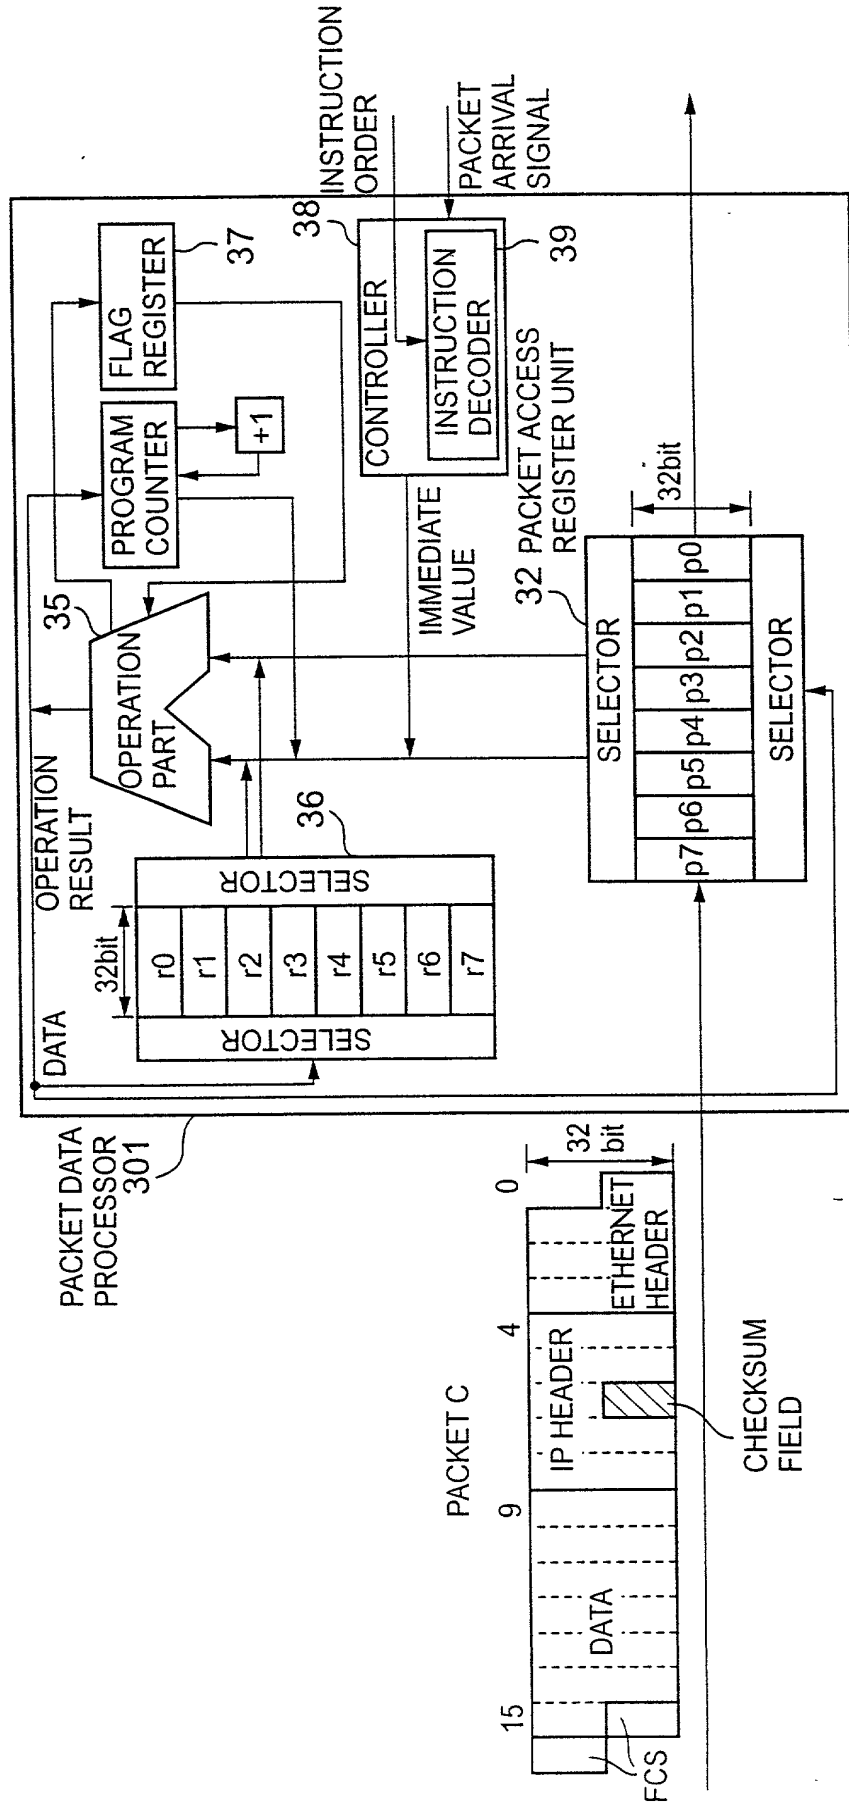


FIG.10


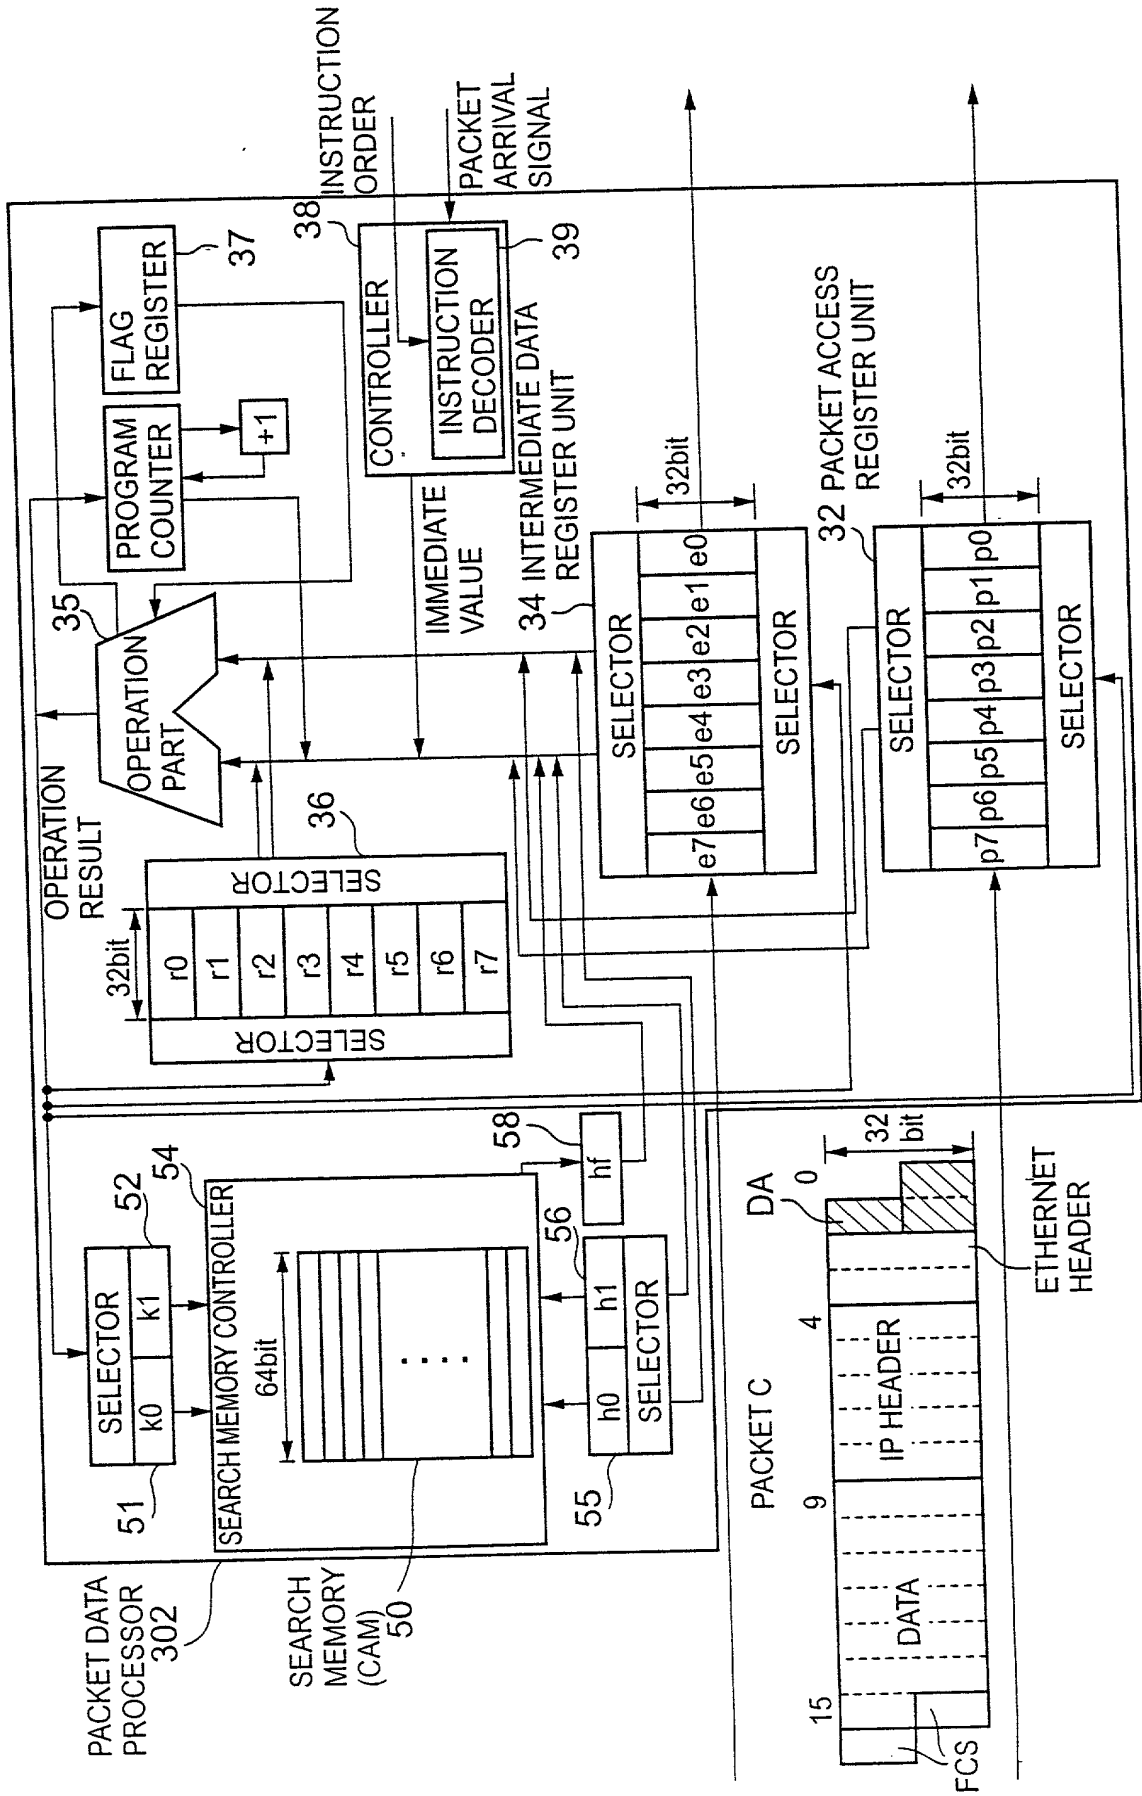


FIG.11

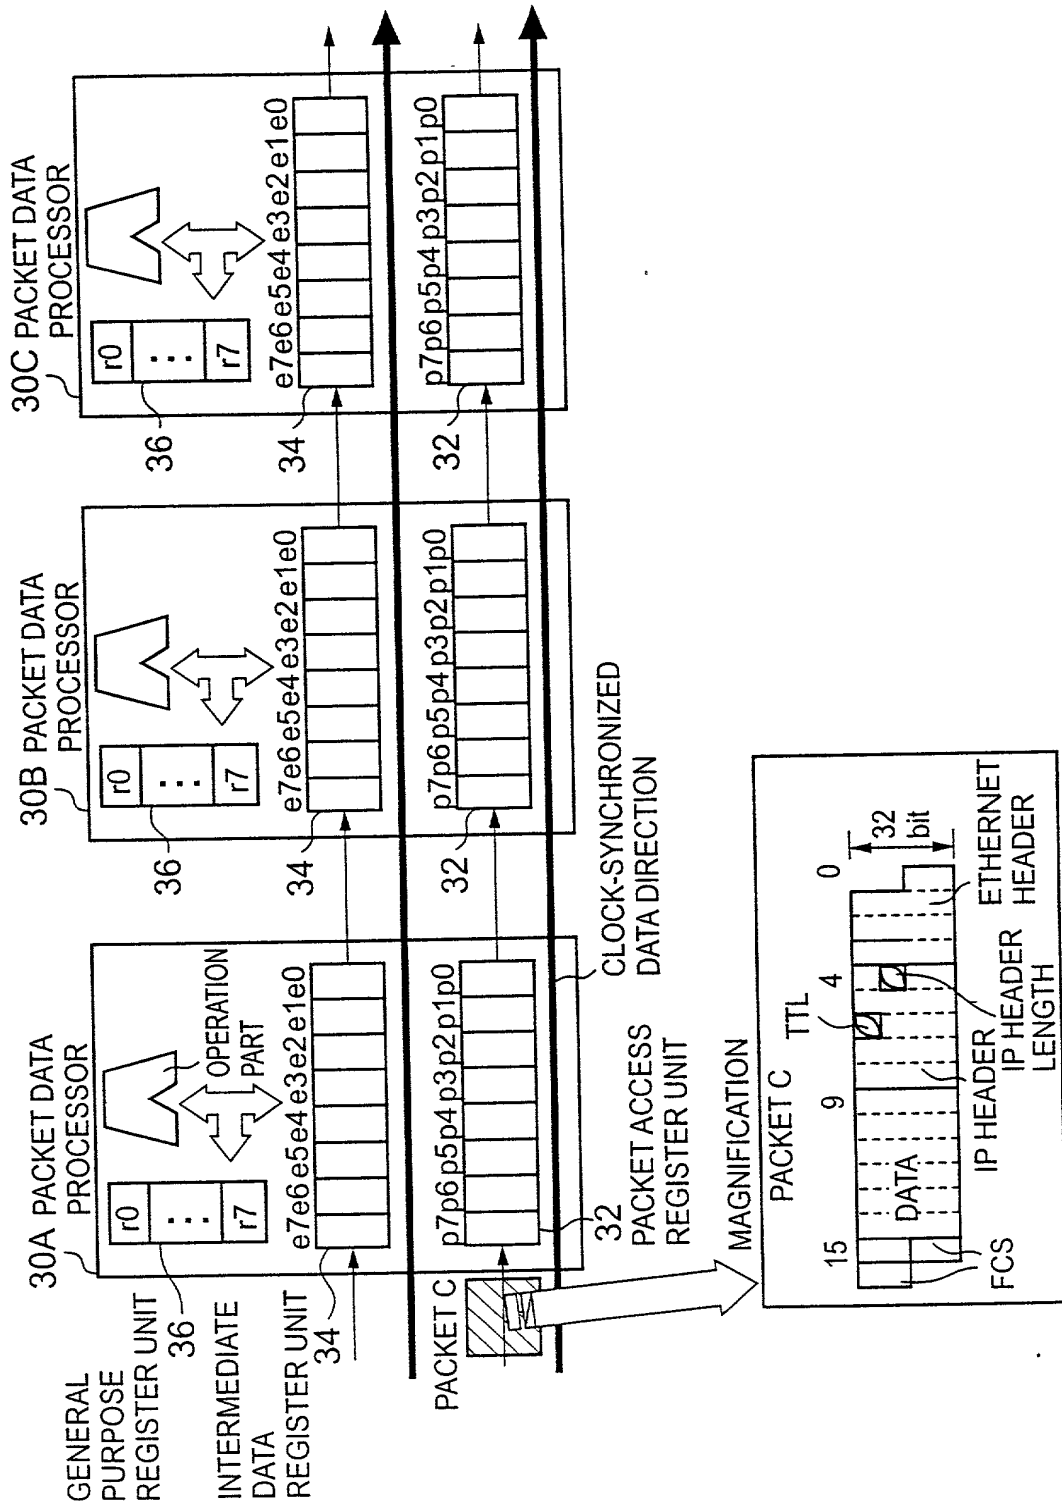

# FIG. 12

SER. NO	INSTRUCTION ORDER OF PACKET DATA PROCESSOR 30A		INSTRUCTION ORDER OF PACKET DATA PROCESSOR 30B		INSTRUCTION ORDER OF PACKET DATA PROCESSOR 30C	
	ORDER NUMBER	INSTRUCTION	ORDER NUMBER	INSTRUCTION	ORDER NUMBER	INSTRUCTION
1	1	ANOP				
2	2	AMOVE r1 \$0				
3	3	ANOT r1 r1				
4	4	ASFR r1 r1 \$24				
5	5	ASFR r1 p7 \$16				
6	6	AAND r0 r0 r1				
7	7	ASUB r0 r0 \$5				
8	8	<MOVE e3 \$1				
9			1	ANOP		
10			2	ANOP		
11			3	ANOP		
12			4	ANOP		
13			5	AMOVE r0 p7		
14			6	AADD r0 r0 p7		
15			7	AADC r0 r0 p7		
16			8	AADC r0 r0 p7		
17			9	AADC r0 r0 p7	1	ANOP
18			10	AADC r0 r0 \$0	2	ANOP
19			11	AMOVE r1 r0	3	ANOP
20			12	ASFR r0 r0 \$16	4	AMOVE r3 \$0
21			13	AADW r0 r0 r1	5	ANOT r3 r3
22			14	ANTW r0 r0	6	ASFR r3 r3 \$8
23			15	≠MOVE e0 \$1	7	AMOVE r0 p7
24					8	ASFR r1 r0 \$24
25					9	ASUB r1 r1 \$1
26					10	=MOVE e3 \$1
27					11	ASFL r1 r1 \$24
28					12	AAND r0 r0 r3
29					13	AADD p0 r1 r0

001030" 6252B560

FIG.13

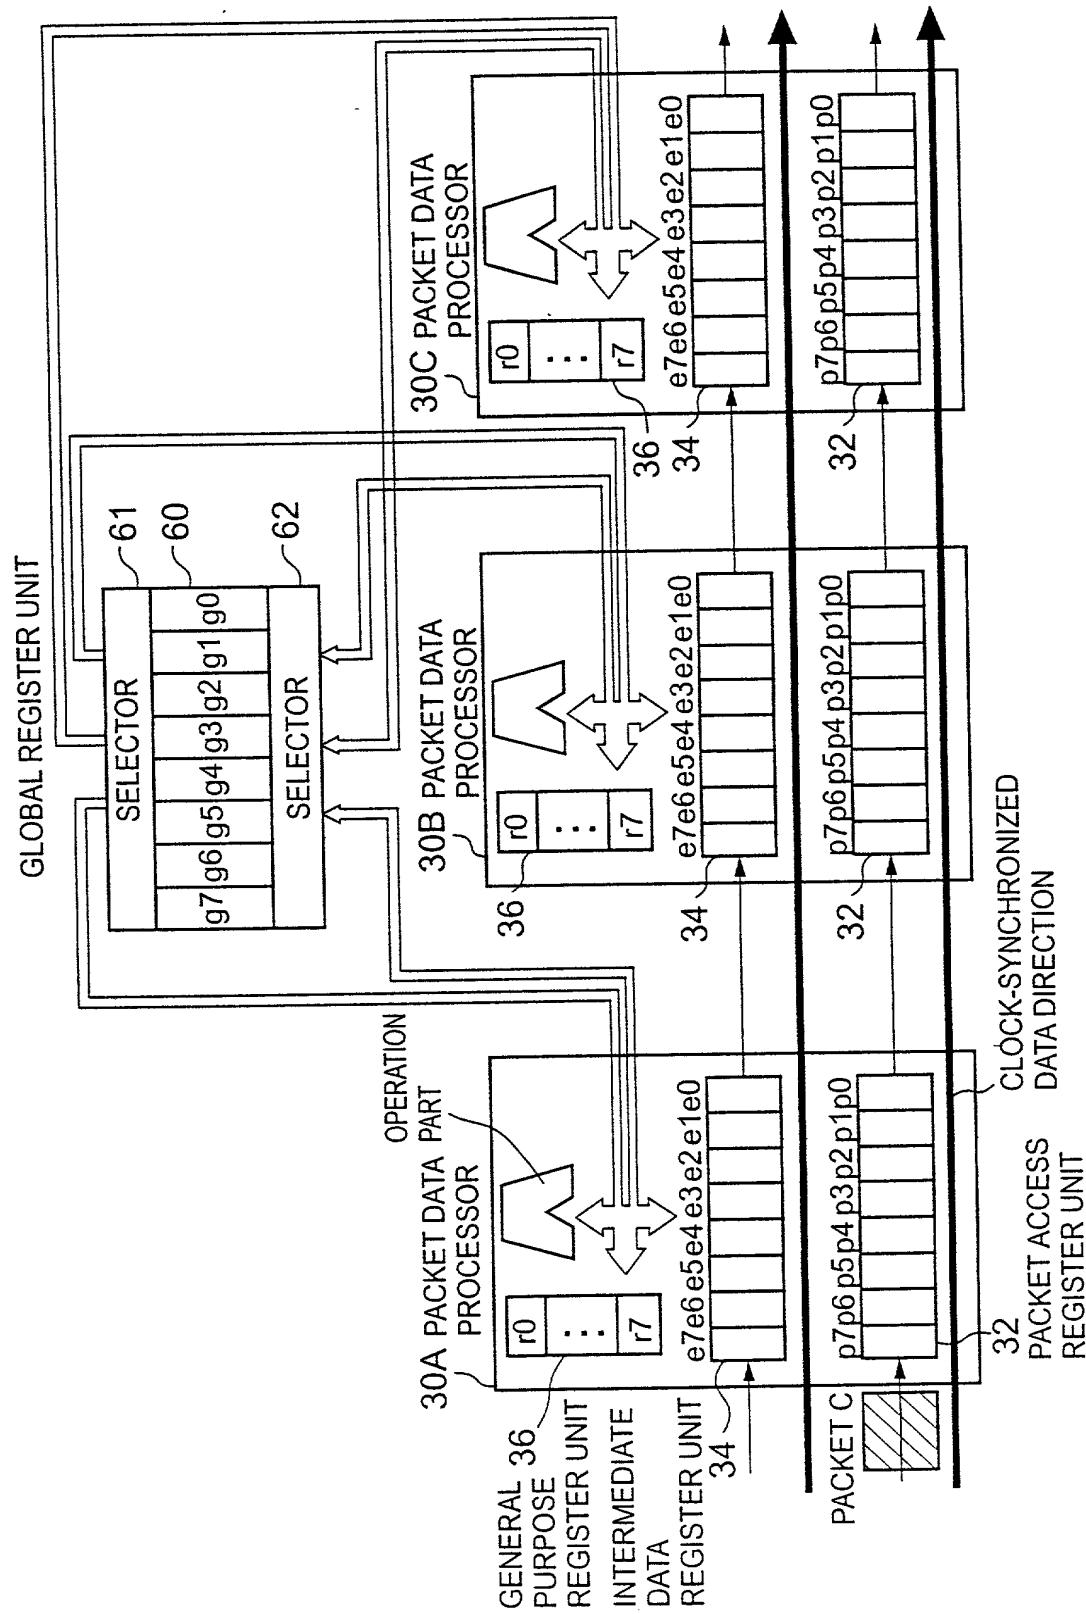


FIG.14

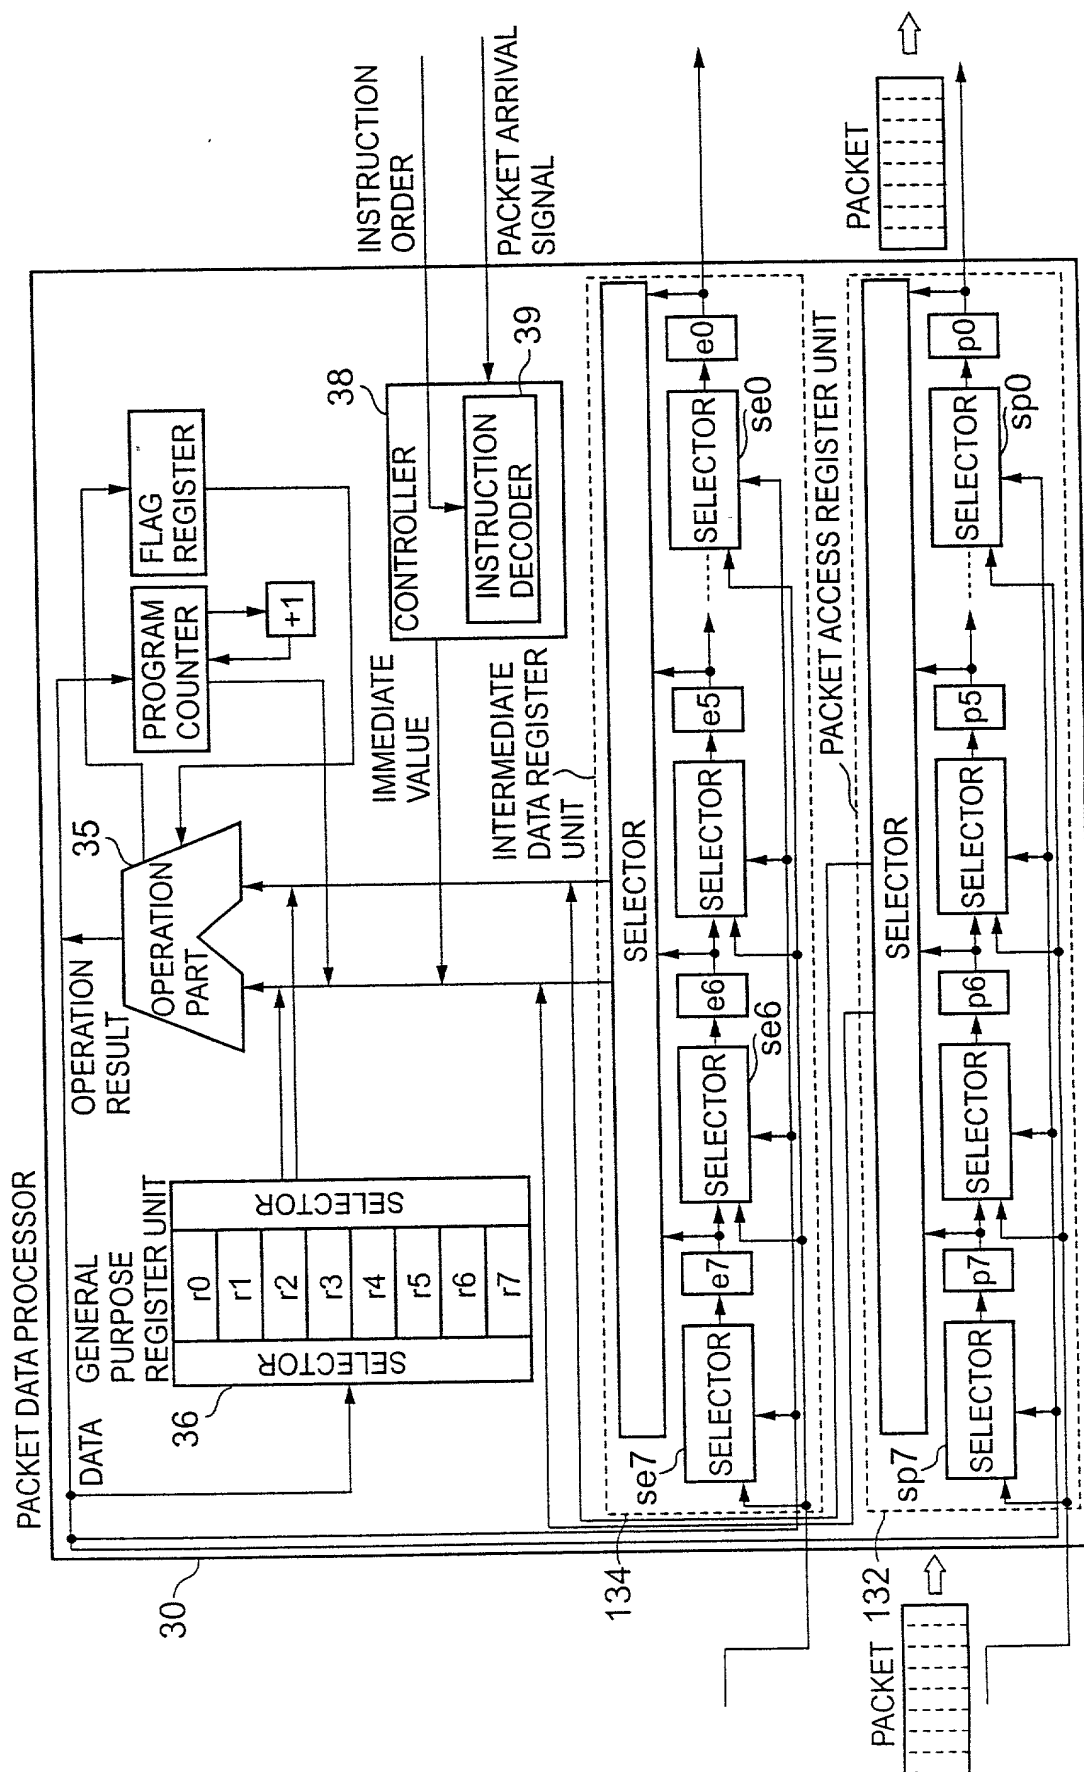


FIG.15



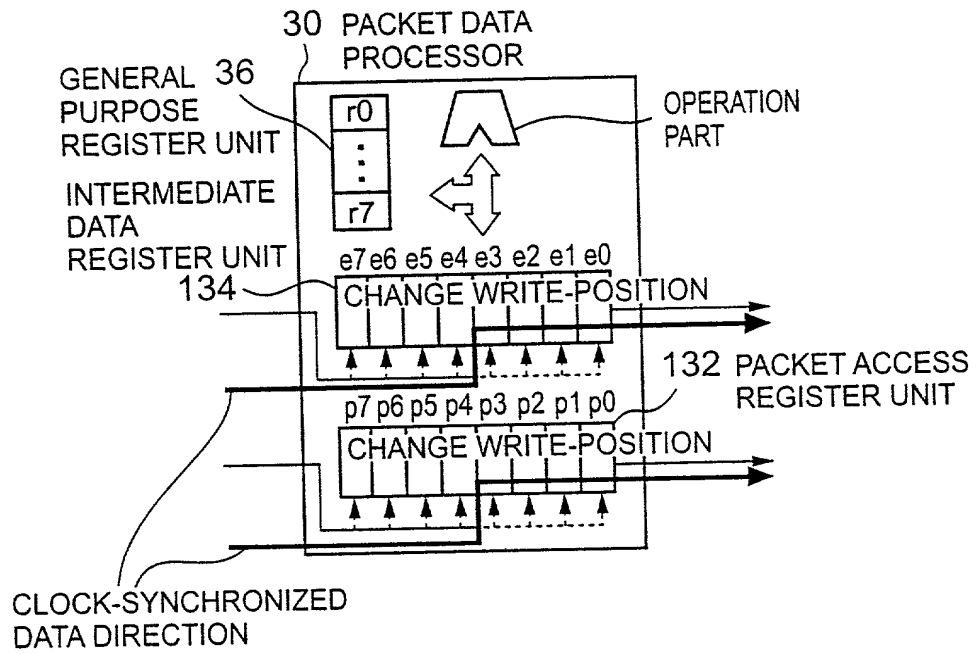


FIG.16



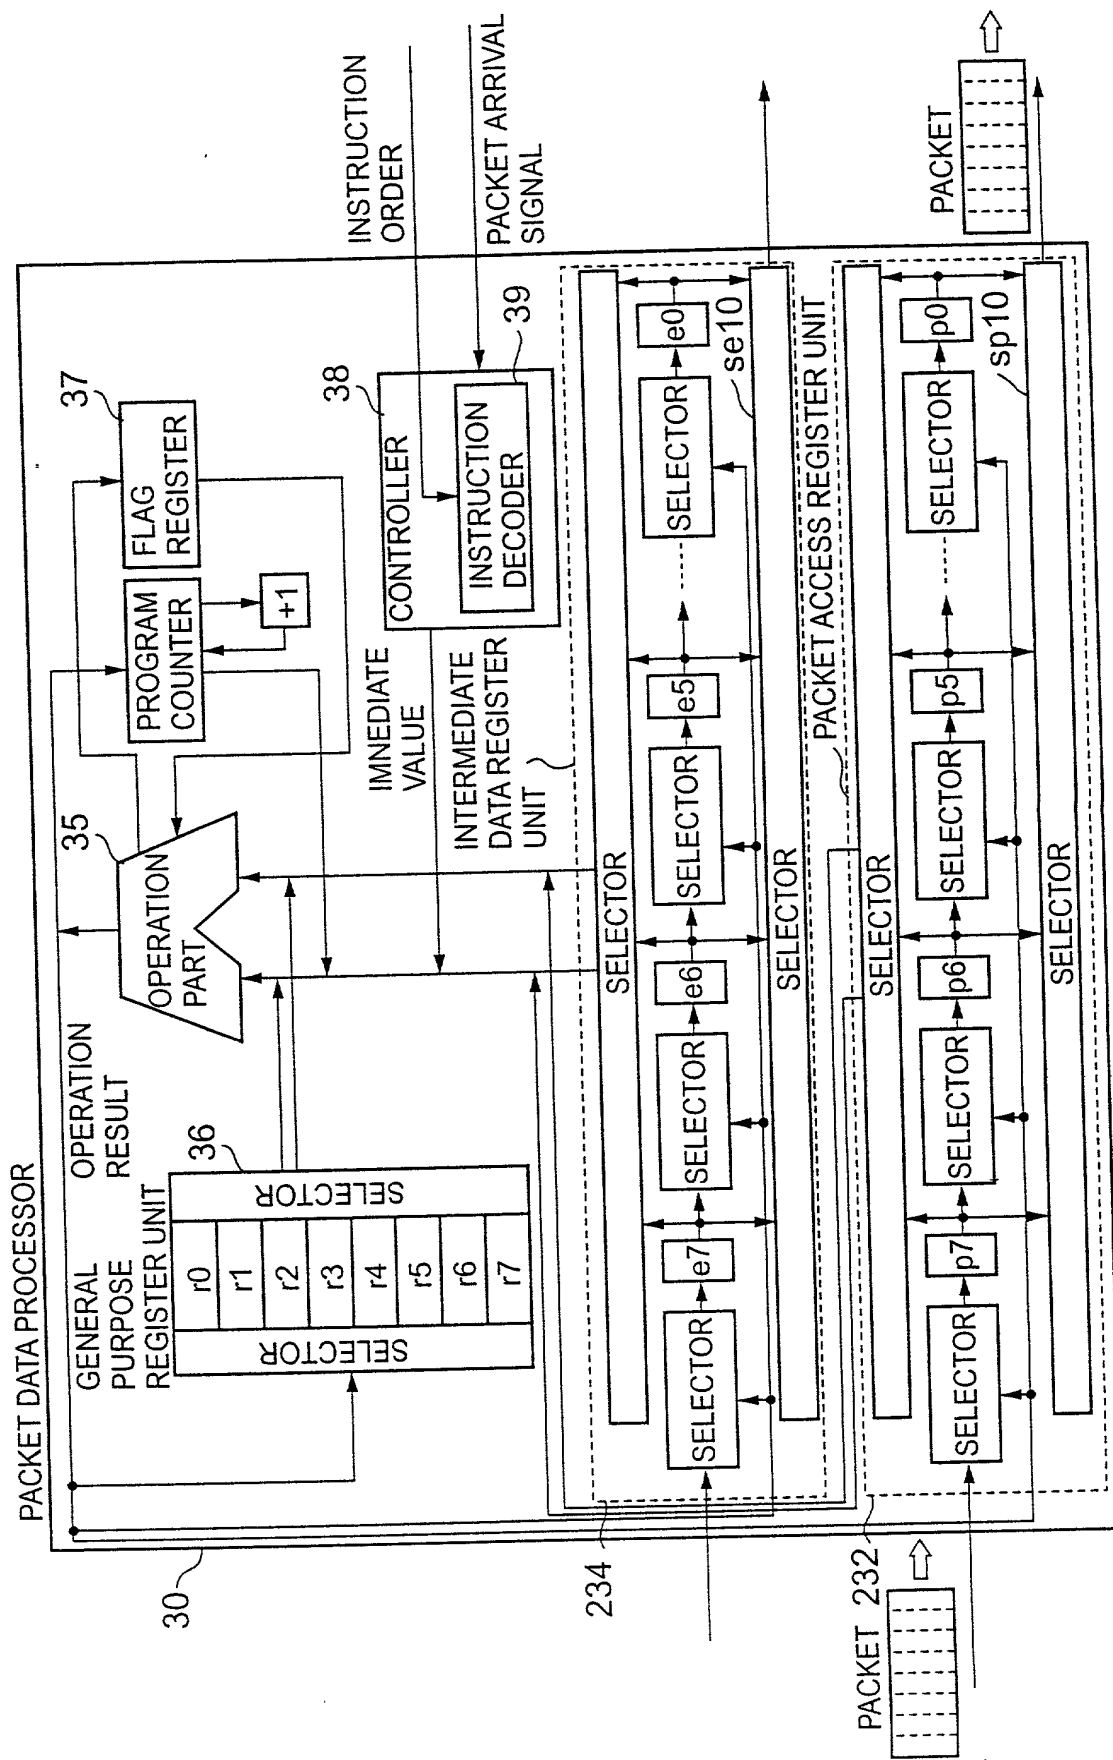

# FIG.17

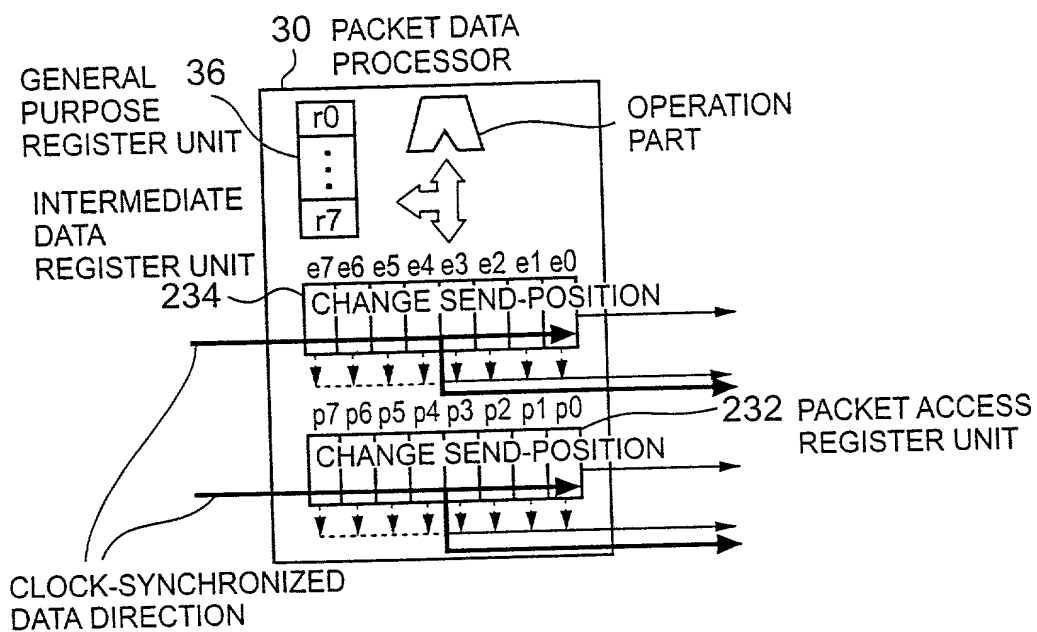

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Declaration and Power of Attorney For Patent Application****特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PACKET DATA PROCESSING APPARATUS ANDPACKET RELAY APPARATUS

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

#### Prior Foreign Application(s)

外国での先行出願  
Pat. Appln. No. 11-158514

Japan

(Number)  
(番号)

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

4/June/1999

(Day/Month/Year Filed)  
(出願年月日)

☐

(Day/Month/Year Filed)  
(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625  
Send Correspondence to:  
HELFGOTT & KARAS, P.C.  
Empire State Building, 60th Floor  
New York, New York 10118  
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.  
(212) 643-5000

唯一または第一発明者名

Full name of sole or first inventor

Yuji Kojima

発明者の署名

日付

Inventor's signature

Date

May 26, 2000

住所

Residence

Kawasaki-shi, Kanagawa, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

c/o FUJITSU LIMITED,

1-1, Kamikodanaka 4-chome, Nakahara-ku,  
Kawasaki-shi, Kanagawa, 211-8588 Japan

第二共同発明者

Full name of second joint inventor, if any

Tetsumei Tsuruoka

第二共同発明者

日付

Second inventor's signature

Date

May 26, 2000

住所

Residence

Kawasaki-shi, Kanagawa, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

c/o FUJITSU LIMITED,

1-1, Kamikodanaka 4-chome, Nakahara-ku,  
Kawasaki-shi, Kanagawa, 211-8588 Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

**THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Application of: **Yuji KOJIMA et al.**

Filed: : **Concurrently herewith**

For : **PACKET DATA PROCESSING APPARATUS AND PACKET RELAY  
APPARATUS**

Serial No.: **Concurrently herewith**

June 1, 2000


Assistant Commissioner of Patents  
Washington, D.C. 20231

**SUB-POWER OF ATTORNEY**

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record  
herein, do hereby grant a sub-power of attorney to Linda S.  
Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354  
and Harris A. Wolin, Reg. No. 39,432 to act and sign in my  
behalf in the above-referenced application.

Respectfully submitted,

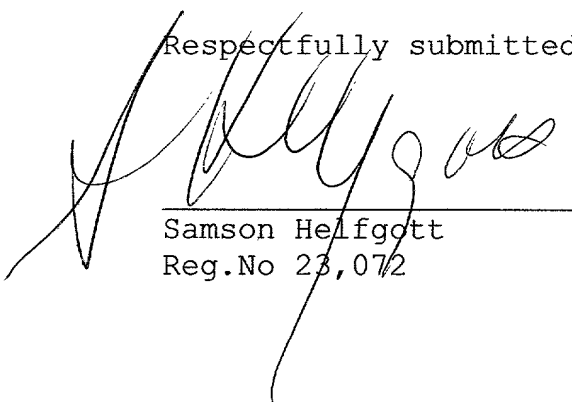  
\_\_\_\_\_  
Samson Helfgott  
Reg.No 23,072

HELFGOTT & KARAS, P.C.  
60th FLOOR  
EMPIRE STATE BUILDING  
NEW YORK, NY 10118  
DOCKET NO.: FUJI 17.379  
LHH:power

Filed Via Express Mail  
Rec. No.: EL522391806US  
On: June 1, 2000  
By: Lydia Gonzalez  
Any fee due as a result of this paper,  
not covered by an enclosed check may be  
charged on Deposit Acct. No. 08-1634.

001099-62523560